

STATE OF KANSAS
 STATE CORPORATION COMMISSION
 30 S. Market, Room 2078
 Wichita, KS 67202

K.A.R.-82-3-117

API NUMBER 15-199-20108 0000

LEASE NAME Arapahoe Unit

WELL NUMBER 116

425 Ft. from N Section Line

330 Ft. from W Section Line

SEC. 6 TWP. 15 SRGE. 42 (E) or (W)

COUNTY Wallace

Date Well Completed 9-5-87

Plugging Commenced 11-13-95

Plugging Completed 11-15-95

TYPE OR PRINT
 NOTICE: Fill out completely
 and return to Cons. Div.
 office within 30 days.

LEASE OPERATOR Union Pacific Resources Company

ADDRESS P.O. Box 7, MS 3006 Fort Worth, TX 76101-0007

PHONE/(817) 877-7941 OPERATORS LICENSE NO. 06417

Character of Well Good

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on October 9, 1995 (date)

by David P. Williams, Production Supervisor (XCC District Agent's Name).

Is ACO-1 filled? Yes If not, is well log attached? _____

Producing Formation Morrow Depth to Top 5151' Bottom 5159' T.D. 5300'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
		0'	764'	8 5/8"		None
		0'	5299'	4 1/2"		None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plug were used, state the character of same and depth placed, from feet to feet each set. TIH w/2:3/8" tubing to 5085'. Pumped 50 sxs 60/40 POZ, 10% gel w/500 # hulls. Lay dn 24 jts tubing to 4341'.

Pumped 23 bbls 9# gel spacer. Lay down 60 jts tubing to 2481'. Pumped 240 sxs 60/40 POZ, 10% gel cmt. Lay down 40 jts to 1241' Pumped 35 sxs 60/40 POZ, 10% gel. Top off casing w/20 sxs 60/40 POZ, 10% gel cmt. Pumped 10 sxs 60/40 POZ, 10% gel cmt. on surface casing. Cut casing 5' below GL. Weld on Cap. Backfilled hole. P&A.

Name of Plugging Contractor J.W. Gibson, Well Service Company License No. _____

Address 7400 East Orchard Rd. Suite 370 Englewood, CO 80111-2531

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Union Pacific Resources Company

STATE OF TX COUNTY OF Tarrant, ss.

Wanda Bartell

(Employee of Operator) or (Operator) of

above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and the same are true and correct, so help me God.

(Signature) Wanda Bartell /Wanda Bartell

(Address) P.O. Box 7, MS 3006 Fort Worth, TX 76101-0007



AND SWORN TO before me this 24 day of January, 19 96

Gaylene F. Reier
 Notary Public

My Commission Expires: 12-9-98

USE ONLY ONE SIDE OF EACH FORM

**UNION PACIFIC RESOURCES CO.
PAGE 2 REPORT**

WELL:	AU116	PMS 17943-02	FIELD: ARAP UNIT
LOCATION (4/4):NWNW	SEC: 6	T: 15S R: 42W	CO/ST: KANAS
KB ELEVATION:	3916'	GL: 3911' TD: 5300'	PBTD: 5287'
PERFORATIONS:	5151'-5159'		ZONE: MORROW
JOB TYPE/DESCRIPTION:	PLUG HOLE		
PRODUCTION CASING:		TUBING:	NONE
WORKING INTEREST:		NET REVENUE INTEREST:	
AFE NUMBER:	AFE S:	SPENT THRU CSG:	
RIG COMPANY:	GIBSON		
	BO BW MCF		
LAST WELL TEST:		LAST PULLED:	DATE REASON:

RPT.DATE OPER.DATE


11-14-95 11-13-95 MIRUSU. PU. and TIH. with 145 jts. 2 3/8" tbg. to 5085'.
RIG-455. ACCUM-455.


11-15-95 11-14-95 MIRU. Allied Cementers, Pump 50 sx. 60/40 Poz, 10% gel with
500# hulls. Lay dn. 24 jts. tbg. to 4341'. Pump 23 bbl., 9# gel spacer. Lay dn. 60 jts. tbg. to
2481'. Pump 240 sx. 60/40 Poz, 10% gel cement, with circulation from time to time. Lay dn.
40 jts. tbg. to 1241'. Pump 35 sx. 60/40 Poz, 10% gel, caught circulation with good cement.
Lay dn. remaining tbg. Top off csg. with 20 sx. 60/40 Poz, 10% gel cement. Pump 10 sx.
60/40 Poz, 10% gel cement dn. surface csg., locked up at 500#, 10 min. RD. Allied. RDSU.
Dig out csg. cut off 5' below ground level, weld on steel cap, back fill hole. final..
RIG-1065 CEMENT JOB-5650 ACCUM-7170

RECEIVED
KANSAS CORPORATION COMMISSION

JAN 25 1996

CONSERVATION DIVISION
WICHITA, KS

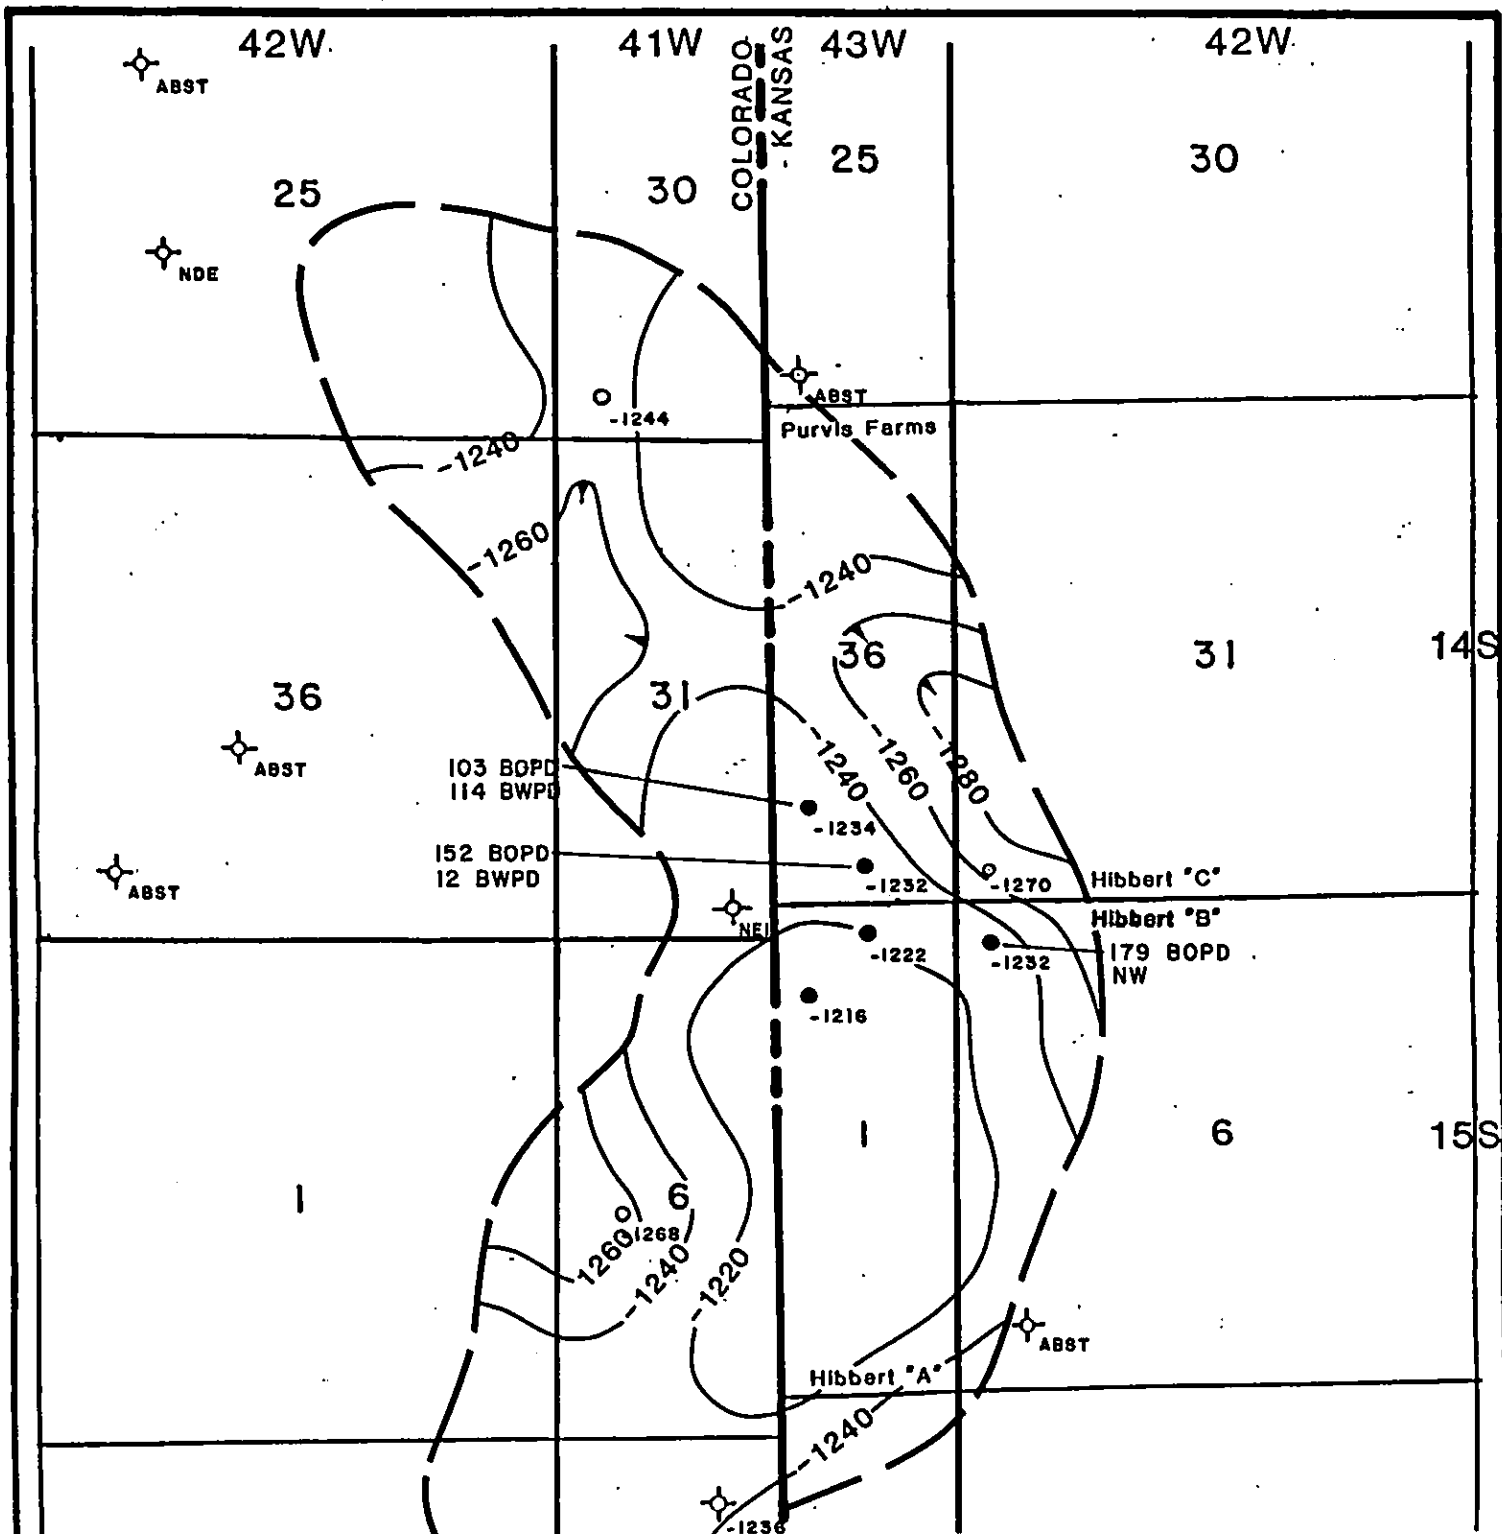


TXO PRODUCTION CORP.
 KANSAS DISTRICT
 WICHITA, KANSAS
STOCKHOLM NORTH
EXHIBIT C

MAP STRUCTURE _____ DATUM MORROW 'B' SANDSTONE
 CONTOUR INTERVAL 20'
 GEOLOGIST BILL MILLER

RECEIVED
 CORPORATION COMMISSION
 NOV 20 1987

CONSERVATION DIVISION
 Wichita, Kansas