

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Greeley County, Sec 26 Twp 16S Rgo. (E) 41W(W)

Location as "NE/CNWSW2" or footage from lines C SE/4

Lease Owner DAN WALKER

Lease Name Schneider Well No. 1

Office Address P. O. Box 12666, Ft. Worth, Tex. 76116

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 9-19 1975

Application for plugging filed 9-19 1975

Application for plugging approved 9-19 1975


Plugging commenced 9-19 1975

Plugging completed 9-19 1975

Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

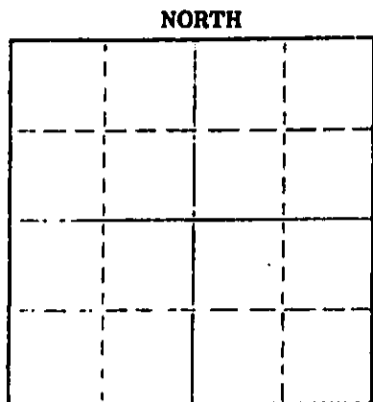

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor

Producing formation Depth to top Bottom Total Depth of Well 3400

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Fluid	Surface	250	8-5/8"	243'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fluid to 1300', plug, 70 sx cement;
Fluid to 250', plug, 20 sx cement;
Fluid to 40', plug, 1/2 sx hulls, 10 sx cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D N B DRILLING, INC.

Address 701 First National Building

Wichita, Kansas 67202

STATE OF JAMES L. DONELSON COUNTY OF

(employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson

701 First Nat'l Bldg., Wichita, Kansas

(Address)

Subscribed and sworn to before me this 25th day of Sept. 1975

My commission expires 8-25-76

Ella Priess
Ella Priess Notary Public.

RECEIVED
STATE CORPORATION COMMISSION

SEP 29 1975

CONSERVATION DIVISION
Wichita, Kansas

Ella Priess
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976

15-071-20094-00-00

DRILLERS' LOG

DAN WALKER
No. 1 Schneider
C SE/4, Sec. 26-16S-41W
Greeley County, Kansas

Elev:

Commenced: 9-15-75
Completed: 9-19-75

Surface Casing: 243' of 8-5/8"
cemented w/200 sx common cement,
3% cc. 9-15-75

<u>FORMATION</u>	<u>DEPTH</u>
Surface Hole	0 - 250
Shale	250 - 900
Shale & Sand	900 - 1689
Lime, Shale & Sand	1689 - 2010
Shale	2010 - 2635
Shale & Lime	2635 - 2930
Lime & Shale	2930 - 3160
Shale & Lime	3160 - 3355
Lime & Shale	3355 - 3400 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

RECEIVED
STATE CORPORATION COMMISSION

SEP 29 1975

CONSERVATION DIVISION
Wichita, Kansas

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 25th day of September 1975.

Ella Priess

Ella Priess, Notary Public

Ella Priess
 STATE NOTARY PUBLIC
 Sedgwick County, Kansas
 My Com. Expires Aug. 25, 1976