


15-071-20063-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

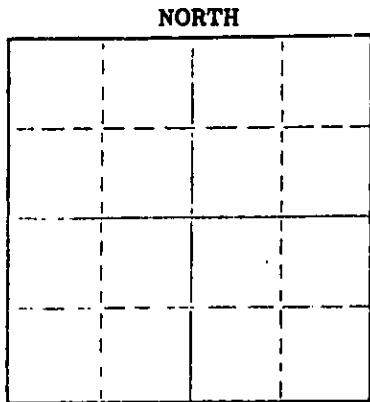

Locate well correctly on above Section Plat

Greeley County, Sec. 29 Twp 17S Rge. (E) 39 (W)  
Location as "NE/CNW&SW" or footage from lines. 1320' EN&EL  
Lease Owner. PHILLIPS PETROLEUM COMPANY  
Lease Name. Shafer 'F' Well No. 1  
Office Address. Box 358, Borger, Texas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed. 7-31-75  
Application for plugging filed. 7-31-75  
Application for plugging approved. 7-31-75  
Plugging commenced. 7-31-75  
Plugging completed. 7-31-75  
Reason for abandonment of well or producing formation. No commercial quantities of oil or gas encountered.  
If a producing well is abandoned, date of last production. 19\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well. Gilbert Balthazor  
Producing formation. Depth to top. Bottom. Total Depth of Well 5250  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM    | TO   | SIZE   | PUT IN | PULLED OUT |
|-----------|---------|---------|------|--------|--------|------------|
| Surface   | Fluid   | Surface | 329' | 8-5/8" | 331    | None       |
|           |         |         |      |        |        |            |
|           |         |         |      |        |        |            |
|           |         |         |      |        |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

50 sx cement 5110-5010;  
 50 sx cement 4394-4294  
 50 sx cement 2950-2940  
 50 sx cement 379-279  
 15 sx cement 35'-5'

Name of Plugging Contractor. D N B DRILLING, INC.  
Address. 701 First National Building  
Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF  
JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson  
701 First Nat'l Bldg., Wichita, Ks.  
(Address)

Subscribed and sworn to before me this 4th day of August 19 75

My commission expires August 25, 1976  
Ella Priess Notary Public.

Ella Priess  
STATE NOTARY PUBLIC  
Sedgwick County, Kansas  
My Com. Expires Aug. 25, 1976

15-071-20063-00-00

DRILLERS' LOG

PHILLIPS PETROLEUM COMPANY  
Shafer 'F' No. 1  
1320' FNS&L, Sec. 29-17S-39W  
Greeley County, Kansas

Elev:

Commenced: 7-15-75  
Completed: 7-31-75

Surface: 331' of 13-3/8"  
cemented w/600 sx Class H  
cement, 34 cu. 7-15-75

FORMATION

DEPTH

|              |                 |
|--------------|-----------------|
| Surface Soil | 0 - 120         |
| Sand & Shale | 120 - 755       |
| Shale        | 755 - 1555      |
| Shale & Sand | 1555 - 1875     |
| Shale        | 1875 - 2600     |
| Anhydrite    | 2600 - 2620     |
| Shale & Lime | 2620 - 2865     |
| Lime & Shale | 2865 - 3584     |
| Lime         | 3584 - 3893     |
| Lime & Shale | 3893 - 3975     |
| Lime         | 3975 - 5020     |
| Lime & Shale | 5020 - 5065     |
| Lime         | 5065 - 5250 RTD |

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

*James L. Donelson*  
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 4th day of August, 1975.

My Commission Expires:  
August 25, 1976

*Ella Pries*  
Ella Pries, Notary Public

|                               |
|-------------------------------|
| <i>Ella Pries</i>             |
| STATE NOTARY PUBLIC           |
| Sedgwick County, Kansas       |
| My Com. Expires Aug. 25, 1976 |