


WELL PLUGGING RECORD

Give All Information Completely
Mud Report Required Affidavit
Mud Report Form Report to
Conservation Division
State Corporation Commission
811 No. Broadway
Wichita, Kansas

Saline County, Sec. 24 Twp. 15 Rge. (E) 4 (W)

Location as "NE/CNW/SE" or footage from lines NE SE SE
Lease Owner Quality Supply Co.
Lease Name Dahlsten Well No. 2
Office Address 701 Union National Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed _____ 19____
Application for plugging filed 2-7 1962
Application for plugging approved _____ 19____
Plugging commenced 3-3 1962
Plugging completed 3-8 1962
Reason for abandonment of well or producing formation _____

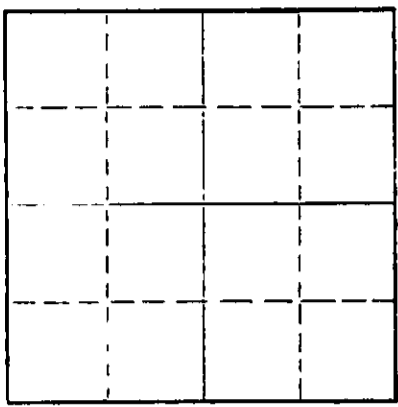

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Cecil Jones
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3413 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	321	none
				5 1/2"	3409 1/2'	2935'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Sanded hole to 3400'-dumped 5 sks cement-
pulled pipe-mudded hole to 320'-set 20' rock
bridge-dumped 4 yds of Ready Mix Cement in
surface casing.

3-19-62

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor R & D Casing Pulling Co. License # 236
Address Box 572, Hutchinson, Kansas

STATE OF Kansas COUNTY OF Se. Dickinson ss.
Jack Shear (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
701 Union Natl. Bldg. (Address)

SUBSCRIBED AND SWORN TO before me this 15th day of March, 1962

My commission expires Dec 22, 1962
Evelyn W. North Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


15-169-0084/0000

Company- J. A. DAVIS & J. H. CHILD
Farm- Dahlsten No. 2

SEC. 24 T. 15 R. 47
NE SE SE

Total Depth. 3413
Comm. 12-29-50 Comp. 1-21-51
Shot or Treated.
Contractor. Sterling Drlg. Co. & E. K. Carey
Issued. 1-26-52

County Saline KANSAS



Elevation. 1290 D.F.

Production. pot. 276 bbls.

CASING:

8 5/8" 322' cem. w/175 sx
5 1/2" 3413' cem. w/50 sx

Figures Indicate Bottom of Formations.

surface soil	30
sand & shale	75
shale & shells	316
anhydrite	321
lime	595
lime & shale	1240
shale & shells	1800
lime & shale	2400
limo	2670
lime & shale	3020
lime & chert	3055
lime	3145
shale	3409
viola	3413
Total Depth	

Tops:	
Miss. Lime	2864
Kinderhook Shale	3172
Misener Sand ?	3302
Hunton ?	3304
Maquoketa Shale ?	3346 corr.
Maquoketa Dolo.	3409

RECEIVED
STATE COMMISSION
MAR 1 - 1962
CONSERVATION DIVISION
Kansas