

STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Saline County, Sec. 25 Twp. 15 Rge. 4 (E) W (W)

Location as "NE/CNW/SW" or footage from lines ~~NE XX NE NW NE~~

Lease Owner Knight Casing Pulling Company

Lease Name Swenson Well No. 2

Office Address Chase, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed 6-29-51 19__

Application for plugging filed _____ 19__

Application for plugging approved _____ 19__


Plugging commenced ~~XXXXXX~~ 1-10-63 19__

Plugging completed 1-17-63 19__

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

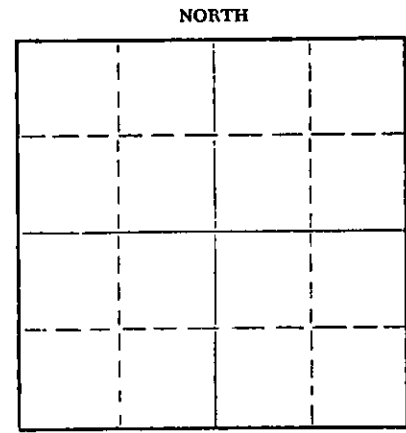

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3414 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
					XXXXXX	X
				8-5/8"	344'	None
				4-1/2"	3410 1/2'	1552

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked hole to 3414', sanded hole to 3400' and dumped 3 sacks of cement @ 3400' with dump bailer. Pulled 4 1/2" casing. Checked fluid to 200', set rock bridge to 190' and ran 20 sacks of cement @ 190'. Mudded to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

FEB 25 1963
2-25-63

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE, ss.
Noel J. Knight (employee of owner) or (~~owner~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas

(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of February, 1963

Milton J. Volin

Notary Public.

My commission expires May 20, 1964

15-169-00846-0000


WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
508 East Murdock Wichita, Kansas

Company - MUSGROVE PETROLEUM CORP., INC.
Farm - Svenson No. 2

SEC. 25 T. 15 R. 11T
NE NW NE

Total Depth. 3414
Comm. 6-17-51 Core 6-29-51
Shot or Treated.
Contractor. Victor Drilling Co.
Issued. 8-11-51

County. Saline KANSAS



Elevation. 1292 DF

Production. 265 BO & 48% wtr

Figures indicate Bottom of Formations.

clay & gravel	130
shale	220
sand & shale	290
lime & shale	304
salt	328
anhydrite	344
lime & shale	766
shale	835
lime & shale	950
shale	1010
lime, shells & shale	1200
lime & shale	1360
shale	1520
shale & lime	1605
shale	1810
lime & shale	1840
lime	1965
lime	2040
shale & lime	2075
shale	2125
lime & shale	2255
lime	2305
lime & shale	2527
lime	2585
lime & shale	2795
shale	2815
lime	3106
lime & chert	3135
lime	3164
shale & lime	3181
lime	3222
shale	3265
lime & shale	3344
lime	3413 RTD
lime	3414
Total Depth	

Tops:	
Mississippian	2860
Kinderhook	3166
Miscner	3311
Hunton	3315
Maquoketa Shale	3344
Maquoketa Dolomite	3380
Viola ? (Producing formation in area)	3410

STATE CORPORATION COMMISSION

FEB 25 1963