

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Saline County, Sec. 25 Twp. 15 Rge. 4 (E) W (W)

Location as "NE/CNWxSWx" or footage from lines SW SW NE

Lease Owner Knight Casing Pulling Company

Lease Name Swenson Well No. 7

Office Address Chase, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 1-29-63 19

Plugging completed 1-31-63 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

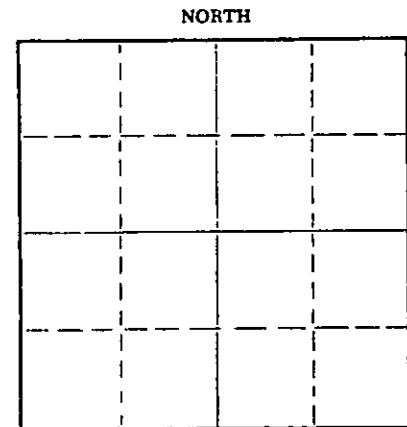

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3412 1/2 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	335'	None
				4-1/2"	3428'	2900'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3410', sanded to 3400' and dumped 4 sacks of cement @ 3400' with dumpbailer. Pulled 4 1/2" casing, checked fluid to 200', set rock bridge to 190' and ran 20 sacks of cement. Mudded to 35' set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

FEB 23 1963
2-25-63

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss.

Noel J. Knight (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight
Chase, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of February, 1963

Milton J. Volin
Notary Public.

My commission expires May 20, 1964



15-169-00851-0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY

502 East Main Street,


Wichita, Kansas

Company- MUSGROVE PETROLEUM CORPORATION
Farm- Svenson No. 7

SEC. 25 T. 15 R. LW
SW SW NE

Total Depth. 3412 1/2
Comm. 5-20-52 Comp. 5-31-52
Shot or Treated.
Contractor. Musgrove Petroleum Corp.
Issued. 7-19-52

County Saline
KANSAS



CASING:
8 5/8" 335' cem w/ 25 sx
4 1/2" 3427.93' cem w/ 75 sx

Production. 1292

Production. 177 bbls. & no wtr

Fluor. indicate Bottom of Formations.

shale	70
sand	85
shale sandy	110
shale, shells	260
anhydrite, shells, shale	275
shale, lime shells	300
anhydrite	335
anhydrite, shale	420
shale, shells	590
shale, lime	1115
shale	1735
shale, lime	2735
shale, shells	2825
shale, lime	2963
shale, lime, chat	2995
shale, lime, chert	3060
chert, lime	3090
chat, lime, shale	3132
shale, lime	3412 1/2
Total Depth Rotary	

Pops: Scout	
Mississippi	2872
Kinderhook	3182
Misoner	3312
Hunton	3313
Sylvan Shale	3346
Maquoketa Dolomite	3378
Maquoketa shale	3390
Viola	3407

STATE ENGINEER

FEB 25 1953

CONTRACTOR