

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Saline County, Sec. 25 Twp. 15 Rge. 4 (E) W (W)

Location as "NE/CNW%SW%" or footage from lines SW NE NE

Lease Owner Knight Casing Pulling Company

Lease Name Swenson Well No. 6

Office Address Chase, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 1-17-63 19

Plugging completed 1-21-63 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

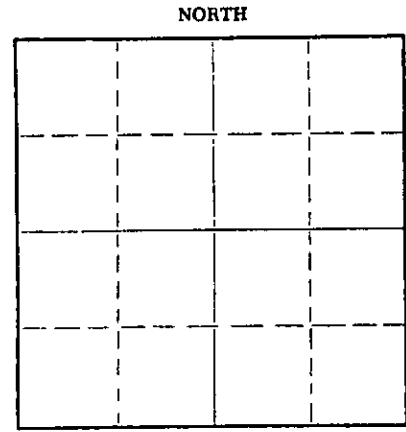

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3412 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	307'	None
				4-1/2"	3404'	1002'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3412', sanded to 3395' and dumped 3 sacks of cement @ 3395' with dump bailer. Pulled 4 1/2" casing. Bailed fluid to 210', set rock bridge to 200' and ran 20 sacks of cement. Mudded to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

FEB 25 1963
2-25-63

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.

Noel J. Knight (Employee/Owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 23rd day of February, 1963

Milton J. Volin

Notary Public.

My commission expires May 20, 1964



WELL LOG BUREAU - KANSAS GEOLOGICAL SOCIETY
 503 East 10th St., Wichita, Kansas


15-169-00850-0000

Company: HUSGROVE PETRO. CORP.
 Farm: SWENSON No. 6

SEC. 25 T. 15 R. 4W
 S7 NE 1/4

Total Depth. 3412
 Comm. 3-5-52 Cor. 3-27-52
 Shot or Treated.
 Contractor Husgrove Petro. Corp.
 Issue: 6-7-52

County Saline KANSAS



Elevation 1291

Production 213 BO & tr wtr.

Figures indicate Bottom of Formations.

clay	25
sand	60
sandy shale	100
shale & shells	307
anhydrite	452
lime & shale	1030
shale	1055
shale & shells	1460
shale	1480
shale & shells	1830
shale & lime	1930
shale & lime shells	2020
shale & shells	2105
shale & lime	2680
shale & lime shells	2810
lime & shale	2985
lime, chert, shale	3049
cherty lime & shale	3079
chert & lime	3120
lime & shale	3412 RT.
Total Depth.	

Scout Tops:	
Miss.	2849
Kinderhook	3169
Miscner	3302
Hunton	3306
Maquoketa Shale	3335
Viola	3402

STATE COMMISSION

FEB 25 1963

CONSTRUCTION

11