



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

P.O. Box 17027 3830 S. Meridian
WICHITA, KANSAS 67217

March 19, 1974

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

RECEIVED
STATE CORPORATION COMMISSION
MAR 25 1974
CONSERVATION DIVISION
Wichita, Kansas

J. Lewis Brock
Administrator
500 Insurance Building
Wichita, Kansas 67202

Dear Sir:

Mr. Walter Odin of Red Tiger Drilling Company has this date requested permission to plug the following described well:

Mr. Odin guarantees payment of the plugging fee:

Operator's full Name: Mack Oil Company

Complete Address: 812 Union Center, Wichita, Kansas 67202

Lease Name: Petermann Well No. 1

Location: C SE NE Sec. 28 Twp. 14 Rge. 9 (R)(W) X

County: Ellsworth Total Depth 3245' Oil Well

Gas Well Input Well SWD Well D & A X Lost Hole

Mr. Odin was instructed to plug the well as follows:

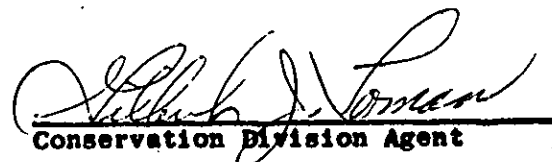
Fill hole with mud. Push plug to 400' and pump 40 sacks cement through

drill pipe at 400'. Pump 25 sacks cement through drill pipe at 225'.

Push plug and 1/2 sack hulls to 40' and cap hole with 10 sacks cement.

Bridge rathole and cement with 2 sacks cement.

Very truly yours,


Conservation Division Agent