

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Hitting Building
Wichita, Kansas

Saline

County, Sec. 26 Twp. 15 Rge. (E) (W) 1

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SE $\frac{1}{4}$ SE $\frac{1}{4}$ NW $\frac{1}{4}$

Lease Owner The Phil-Han Oil Company

Lease Name Tinkler Well No. 1

Office Address Union National Bank Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed February 7, 1943 19

Application for plugging filed February 8, 1943 19

Application for plugging approved February 9, 1943 19


Plugging commenced February 9, 1943 19

Plugging completed February 9, 1943 19

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation Depth to top Bottom Total Depth of Well 3390 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	168'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole filled with mud from bottom at 3390' to 165'. Put in bridge and 10 sacks of cement. Filled with mud up to 20'. Put in bridge and 5 sacks of cement which filled within 4' of surface. Welder cut off surface pipe 4' under surface and welded cap on. Filled with soil to surface level. 168' of 8 5/8" surface pipe left in hole.

26 15 1W
63 44

2-13-43

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Phil-Han Oil Company
Address Union National Bank Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Perry R. Hanson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Perry R. Hanson

Union National Bank Bldg., Wichita, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 12th day of February, 1943

Ruel Durkee
Notary Public

My commission expires Oct. 4, 1945.



15469-19034-0000

Company - The Phil-Han Oil Co.
Contractor - Veeder Supply & Dev. Co.

Tinkler #1
SE SE NW Sec. 26-15-1W
Saline County, Kansas

Comm. 1-22-43
Comp. 2-7-43

Elevation - 1236
Production - D & A


blue shale	55
gravel lime	75
gy & lime shells	120
lime & shale breaks	168
lime & shale	185
lime shell & shale	225
red rock & shale	290
lime & shale	295
sandy lime	400
sand & shale	435
lime & sand	470
shale & shells	505
lime & sand	600
shale	620
lime	645
lime & shale	720
red bed	730
shery sand	760
shale & lime	820
lime sand	860
shale shells	1155
shale	1250
lime shells & shale	1270
lime & shale	1420
sand & shale	1440
lime	1500
shale & lime	1580
sandy shale	1600
sandy lime	1650
shale shells	1710
shale	1760
lime & shale	1850
shale & shells	1880
lime red bed & shale	1920
lime & shale	2060
lime	2100

shale & lime	2125
lime	2150
shale	2165
lime & shale	2315
lime	2395
lime & shale	2560
shale	2580
chert, shale, lime	2590
lime & chert	2605
chert	2625
lime, shale, chert	2650
chert & lime	2665
chert, chert, shale	2750
lime & shale	2780
cherty lime	2805
lime & shale	2825
shale	2895
shale & lime	2980
chert & lime	2995
dolomite & chert	3045
lime & shale	3105
shale & shells	3140
lime	3155
shale & lime	3195
chert & lime	3275
lime & sand	3360
chert, lime, arb.	3375
lime	3390

168' of 8 5/8" surface cemented
with 100 sacks and left in hole.

STATE OF KANSAS)
SE
SEDWICK COUNTY)

FILE 26 15 1W
BOOK 63 44

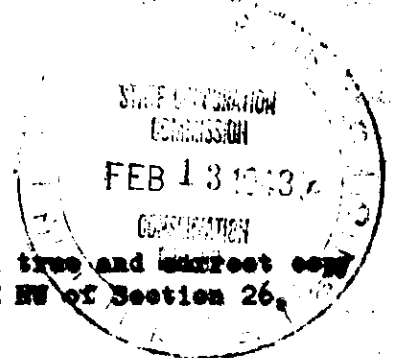

I hereby affirm that the above and foregoing is a true and correct copy
of the log of the #1 Tinkler well, located in the SE SE NW of Section 26,
Township 15 South, Range 1 West, Saline County, Kansas.

THE PHIL-HAN OIL COMPANY

By Henry R. Hummer
President

Subscribed and sworn to before me, this 12th day of February, 1943.

Nelson A. Steimberg
Notary Public.

My commission expires:

Feb 11, 1945