


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

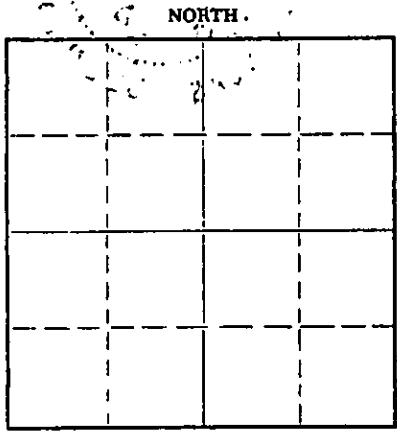

Saline County. Sec. 31 Twp. 15 Rge. 1 XXXX (W)
Location as "NE/CNW&SW" or footage from lines. C-SE/4 SE/4
Lease Owner Dale Reese Oil Company
Lease Name Schwarz Well No. 1
Office Address 415 E. Prescott, Salina, Ks - 67401
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed October 26, 19 68
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 19
Plugging completed October 26, 19 68
Reason for abandonment of well or producing formation


If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Hugh Scott
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Shale		0	90	8 5/8"	90'	None
Anhydrite		90	110	8 5/8"	20'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Set bottom plug at 110 ft. with 20 sacks cement.
Filled hole with mud, set top plug at 40 ft., with
10 sacks cement and 2 sacks ~~XXXXXX~~ in rathole.
Hole plugging completed at 9:00 A.M., October 26,
1968 by Hugh Scott, State Plugger of McPherson, Ks.




(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor BLACKSTONE DRILLING, INC.
Address Box # 455, McPheson, Kansas - 67460

STATE OF KANSAS, COUNTY OF SALINE, ss.
DALE REESE (employee of owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dale Reese
415 E. Prescott, Salina, Kansas-67401
(Address)

to before me this 29 day of October, 19 68
My 7. 17 69
Notary Public.





15-169-20023-0000

Blackstone Drilling, Inc.

Box 455 • 523 West Kansas • Phone CH 1-1250

McPHERSON • KANSAS
67460

October 28, 1968

COMPANY: DALE REESE OIL COMPANY
CONTRACTOR: BLACKSTONE DRILLING, INC.
FARM: SCHWARZ # 1
LOCATION: C-SE/4 SE/4, Sec. 31-15-1W,
Saline County, Kansas
COMMENCED: October 22, 1968
COMPLETED: October 26, 1968
ELEVATION: 1281 K.B.

0	to	90	Shale
90	to	110	Anhydrite
110	to	890	Lime
890	to	1290	Shale & Lime
1290	to	1620	Lime & Shale
1620	to	1825	Lime
1825	to	2065	Lime & Shale
2065	to	2507	Lime
2507	to	2670	Lime & Shale
2670	to	2697	Mississippi
		2697	T. D.

RECEIVED
STATE CORPORATION COMMISSION
DEC 3 1968
CONSERVATION DIVISION
Wichita, Kansas


Cut 12 1/4 in. hole to 110 ft. and run 114 ft. of 8 5/8 in. surface pipe, cemented with 85 sacks on bottom at 110 ft. Plug down at 11:00 A.M., October 21, 1968. Cut 7 7/8 in. hole to 2697 ft. Hole dry and abandoned. Set bottom plug at 110 ft. with 20 sacks. Filled with mud, set top plug at 40 ft. with 10 sacks cement and 2 sacks in rathole. Hole plugging completed at 9:00 A.M., October 26, 1968 by Hugh Scott, State Plugger of McPherson, Kansas.

TOPS: Kansas City - Mississippi - 2669'


Measurements taken from K.B.

CERTIFICATE

I, H. J. Plouffe, President of Blackstone Drilling, Inc. do hereby certify that the above and foregoing is a true and correct copy of log on your Schwarz #1, located on the C-SE/4 SE/4 of Sec. 31-15-1W, Saline County, Kansas as reflected by the files of Blackstone Drilling, Inc.


H. J. Plouffe, President

Subscribed and sworn to before me a Notary Public in and for McPherson County, Kansas this 28th day of October, 1968.


Ruth McVay - Notary Public

My Commission Expires: December 18, 1969.

