


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH

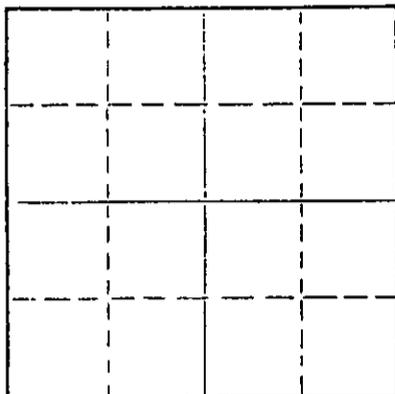

Saline County. Sec. 31 Twp. 15 Rge. 1 (E) (W) X
Location as "NE/CNW/SW" or footage from lines _____
Lease Owner Frank J. Plack
Lease Name Peterson Well No. #1
Office Address Box 150 McPherson, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) _____
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced 10-19-71 _____ 19____
Plugging completed 10-21-71 _____ 19____
Reason for abandonment of well or producing formation _____
If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

Name of Conservation Agent who supervised plugging of this well Gilbert Toran
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2706' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	2703'	2142.63'
				8 5/8"	125'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 2600'. Mixed and ran 5 sacks cement thru dump bailer. Mudded hole to 140', set 10' rock bridge. Mixed and ran 25 sacks cement thru dump bialer. Mudded hole to 40' - set 10' rock bridge. Mixed and dumped 10 sacks cement to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
OCT 28 1971
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer, Inc.
Box 364 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 22 day of October, 19 71


My commission expires



October 1972

Notary Public.

SEP 19 1970



Blackstone Drilling, Inc.

Box 455 • 523 West Kansas • Phone CH 1-1250

McPHERSON, KANSAS 67460

January 13, 1970

31-15-1W
NE 1/4 NW 1/4
15-169-20032-0000

COMPANY: DALE REESE OIL COMPANY

CONTRACTOR: BLACKSTONE DRILLING, INC.

FARM: PETERSON #1

LOCATION: NE/4 NE/4 NW/4, Sec. 31-15-1W
Saline County, Kansas

COMMENCED: January 6, 1970

COMPLETED: January 12, 1970

ELEVATION: 1318 K. B.

15 BOPD + with
miss

0	to	122	Lime
122	to	395	Lime & Shale
395	to	665	Lime
665	to	915	Shale & Lime
915	to	1285	Lime & Shale
1285	to	1585	Shale & Lime
1585	to	1700	Lime
1700	to	2170	Lime & Shale
2170	to	2485	Lime
2485	to	2699	Lime & Shale
2699	to	2707	Mississippi
		2707	T. D. P.D.T.D.

RECEIVED
STATE CORPORATION COMMISSION
SEP 17 1971
CONSERVATION DIVISION
Wichita, Kansas

Cut 12 1/4 in. hole to 122 ft. and run 125 ft. of 8 5/8 in. surface pipe, cemented with 115 sacks cement at 122 ft., plug down at 6:30 P. M., January 6, 1970. Cut 7 7/8 in. hole to 2707 ft. and run 2727 ft. of 5 1/2 in. pipe, cemented with 40 sacks 4 ft. off bottom at 2703 ft. Plug down at 5:30 P. M., January 12, 1970.

TOPS: Kansas City- 2074' Mississippi-2699'

Measurements taken from K. B.

CERTIFICATE

I, H. J. Plouffe, President of Blackstone Drilling, Inc. do hereby certify that the above and foregoing is a true and correct copy of log on your Peterson #1, located on the NE/4 NE/4 NW/4 Sec. 31-15-1W, Saline County, Kansas as reflected by the files of Blackstone Drilling, Inc.

H. J. Plouffe
H. J. Plouffe, President

Subscribed and sworn to before me a Notary Public in and for McPherson County, Kansas this 13 day of January, 1970.

Joannie L. Schmidt
Joannie L. Schmidt - Notary Public

Expires: June 27, 1973.

