


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

WELL PLUGGING RECORD



Locate well correctly on above
Section Plat

Barber County, Sec. 14 Twp. 32S. Rge. (E) 15 (W)
Location as "NE/CNW/SW" or footage from lines: 100' S. of
Lease Owner: Dean Allison Oil Company
Lease Name: Larkin Well No. 1
Office Address: 507 Insurance Building - Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole): Dry Hole
Date well completed: April 2, 1974
Application for plugging filed: 19
Application for plugging approved: 19
Plugging commenced: April 2, 1974
Plugging completed: April 2, 1974
Reason for abandonment of well or producing formation: Dry Hole

If a producing well is abandoned, date of last production: 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (Mr. Russell Bieberstein, Attica, Kansas)


Name of Conservation Agent who supervised plugging of this well:
Producing formation: Depth to top: Bottom: Total Depth of Well: 3530' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface Casing	0	248'	8 5/8"	248'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud from total depth to 225'
35 sax cement at 225'. Heavy mud to
40', hulls and plug bridged and 10
sax cement to base of cellar, and
2 sax cement in rat hole. Job
completed at 7:15 am by Allied Cementing
Co., Inc.

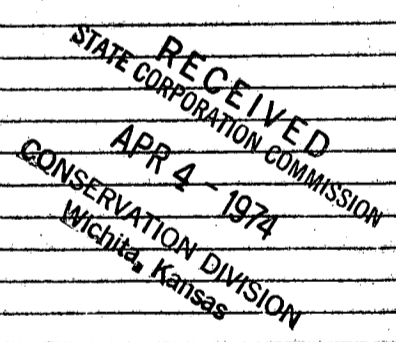

Name of Plugging Contractor: Allied Cementing Co., Inc.
Address: Box 207 - Russell, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK

William J. Froelich, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) William J. Froelich, Jr.
Wichita, Kansas
P. O. Box 18148
(Address)

Subscribed and sworn to before me this 4th day of April, 1974



Maxine Dressen
Notary Public

DRILLERS LOG

LARKIN NO. 1

CASING RECORD:

8 5/8" set at 248'
w/225 sax cement

TOTAL DEPTH:

3530'

OPERATOR:

Dean Allison Oil Co.

CONTRACTOR:

Search Drilling Company

COMMENCED:

March 26, 1974

COMPLETED:

April 2, 1974

DESCRIPTION:

100' S of NW SE
Sec. 14-32S-15W
Barber County,
Kansas

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Soil and Shale	0	40	
Shale and Redbed	40	96	
Shale and Gyp Rock	96	185	
Shale and Redbed	185	650	
Shale and Shells	650	900	
Shale and Shells	900	1136	
Shale	1136	1636	
Shale and Lime	1636	2172	
Shale and Lime	2172	2234	
Shale and Lime	2234	2400	
Shale	2400	2435	
Lime and Shale	2435	2620	
Lime	2620	2765	
Lime and Shale	2765	2886	
Lime	2886	2990	
Lime	2990	3100	
Lime and Shale	3100	3195	
Lime	3195	3210	
Lime and Shale	3210	3340	
Lime	3340	3470	
Lime	3470	3510	
Lime	3510	3530	D&A

RECEIVED
 STATE CORPORATION COMMISSION
 APR 4 - 1974
 CONSERVATION DIVISION
 Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SEARCH DRILLING COMPANY

By William J. Froelich, Jr.
 William J. Froelich, Jr.

Subscribed and sworn to before me this 4th. day of April, 1974.

My Commission expires:
February 19, 1977

Maxine Dressen
 Maxine Dressen - Notary Public

