

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-119-20466-00-00  
Spot: NESWSE Sec/Twnshp/Rge: 26-34S-30W  
860 feet from S Section Line, 1967 feet from E Section Line  
Lease Name: ADAMS Well #: 1-26  
County: MEADE Total Vertical Depth: 6100 feet

Operator License No.: 5225  
Op Name: QUINQUE OPERATING COMPANY  
Address: 908 NW 71ST ST  
OKLAHOMA CITY, OK 73116

String	Size	Depth (ft)	Pulled (ft)	Comment
CIBP		5324		WITH 10 SX CMT
SURF	8.625	1536		WITH 760 SX CMT
PROD	4.5	6100	1750	WITH 225 SX CMT

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/23/2011 9:30 AM  
Plug Co. License No.: 33311 Plug Co. Name: PHIL DOLLAR OILFIELD SERVICES, INC.  
Proposal Rcvd. from: BLAINE FLAMING Company: PHIL DOLLAR OILFIELD SERVICE Phone: (806) 202-0046

Proposed Plugging Method: PUMP 40 BBLS MUD DOWN 4-1/2 CSG. SET CIBP AT 5324'. PUMP 10 SX CMT ON TOP. SHOOT CSG AT FREE POINT. LAY DOWN SAME. TIH WITH TBG. LOAD HOLE WITH MUD AND PUMP 300# COTTON SEED HULLS. PUMP 50 SX CMT AT 1560'. TOH TO 600'. PUMP 50 SX CMT. TOH TO 60". PUMP CMT TO SURFACE.

Plugging Proposal Received By: STEVE PFEIFER WitnessType: COMPLETE (100%)  
Date/Time Plugging Completed: 09/23/2011 9:30 AM KCC Agent: KENNY SULLIVAN

Actual Plugging Report:

SET CIBP @ 5324' & PUMP 10 SX CMT ON TOP. TIH WITH TBG. 1ST PLUG AT 1560'. LOAD WITH MUD & PUMP 300# HULLS & 50 SX CMT. 2ND PLUG AT 600' WITH 50 SX CMT. 3RD PLUG AT 60' WITH 25 SX CMT.

Perfs:

Top	Bot	Thru	Comments
5953	5960		
5374	5380		

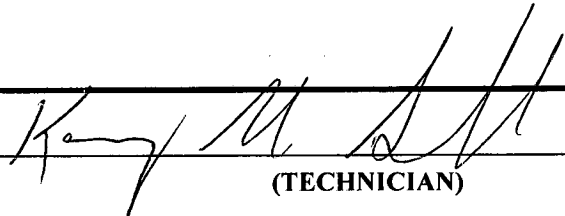
RECEIVED  
OCT 11 2011  
KCC WICHITA

Remarks: USED COMMON CEMENT BY PHIL DOLLARD OILFIELD SERVICES.

Plugged through: CSG

District: 01

Signed

  
(TECHNICIAN)

RECEIVED

SEP 30 2011

KCC DODGE CITY

Form 01-273

10/12/11