

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-071-20593-00-00  
Spot: S2SE Sec/Twnshp/Rge: 25-17S-40W  
660 feet from S Section Line, 1320 feet from E Section Line  
Lease/Unit Name: WEAR B Well Number: 2-25  
County: GREELEY Total Vertical Depth: 3050 feet

Operator License No.: 33156  
Op Name: ROCKFORD ENERGY PARTNERS, LLC  
Address: 2800 FIRST PLACE TOWER 15 E. 5TH S  
TULSA, OK 74103

Production Casing Size: 4.5 feet: 3049 WITH 600 SX CMT  
Surface Casing Size: 8.625 feet: 279 WITH 200 SX CMT

\$99<sup>13</sup>

Well Type: GAS UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 07/15/2003 9:25 AM  
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.  
Proposal Rcvd. from: DAVE OLSON Company: ROCKFORD ENERGY Phone: (620) 376-8190

Proposed Plugging Method: FILL CASING WITH CMT TO SURFACE. PRESSURE TEST. CHECK BACKSIDE.

Plugging Proposal Received By: KEVIN STRUBE WitnessType: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: 07/15/2003 9:55 AM KCC Agent: KEVIN STRUBE

Actual Plugging Report:


PBTD 3022'. PERFS AT 2930-2988.5'. PUMPED DOWN 4 1/2" CASING 300# HULLS & 200 SX CMT. MAXIMUM PRESSURE 1000#. SHUT IN AT 500#. PUMPED DOWN 8 5/8" X 4 1/2" ANNULUS 15 SX CMT. MAXIMUM PRESSURE 500#. SHUT IN PRESSURE 500#.

RECEIVED  
AUG 04 2003  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES. NO CASING RECOVERED.

Plugged through: CSG

District: 01

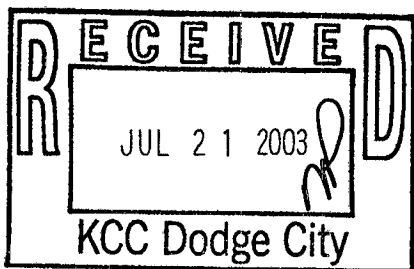

Signed \_\_\_\_\_

*Kevin Strube*

(TECHNICIAN)

Form 2/3