


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

GREELEY County, Sec. 33 Twp. 17S Rge. 40W (E) (W)

Location as "NE/CNW/SW" or footage from lines C SW SW  
Lease Owner APACHE CORPORATION  
Lease Name TEICHMANN Well No. 1  
Office Address 823 Detroit, Tulsa, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed December 17, 1962  
Application for plugging filed December 18, 1962  
Application for plugging approved December 18, 1962  
Plugging commenced December 18, 1962  
Plugging completed December 18, 1962  
Reason for abandonment of well or producing formation Dry Hole



Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Eldon Petty, Hays, Kansas  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 5282 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Sand, Gravel & Shale	Surface Csg.	-0-	316.19'KB	13-3/8"	316.19'KB	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

**PLUGGED:** Filled hole with mud 5282' up to 300',  
Halliburton Plug, 1/4 sk. hulls, 35 sx.  
cement through casing by Halliburton.  
Filled hole with mud to 35', Halliburton  
Plug, 1/4 sk. hulls, 15 sx. cement to  
cellar -0-.

Job completed 9:30 p.m. 12-18-62.

RECEIVED  
STATE CORPORATION COMMISSION

DEC 26 1962

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor SIERRA PETROLEUM CO., INC.  
Address 208 Petroleum Building, Wichita, Kansas


STATE OF KANSAS COUNTY OF RUSSELL, ss.

C. T. HONAKER, DRILLING SUPERINTENDENT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. T. Honaker C. T. HONAKER, DRIG. SUPT.

Box 232, Russell, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of December, 19 62

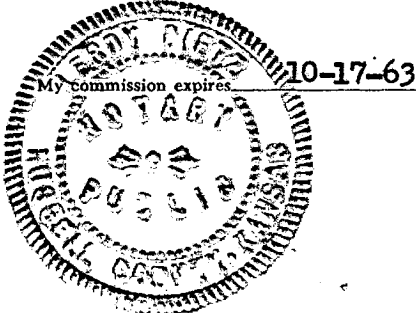

Jerry Dietz  
Notary Public

15-071-10025-00-00

APACHE CORP. - Operator

SIERRA PETROLEUM CO., INC. - Contractor

TEICHMANN #1  
C SW SW  
Sec. 33-17S-40W  
Greeley County, Kansas

T. D.: 5282'  
Elev.: 3626' K.B.

Commenced: 11-28-62  
Completed: 12-17-62

Casing:  
13-3/8" Set at 316.19' K.B.

RECEIVED  
STATE CORPORATION COMMISSION

Cement:  
with 375 sx. Pozmix

DEC 26 1962

FORMATION

CONSERVATION DIVISION  
Wichita, Kansas

DEPTH

Sand & Gravel	318
Shale	1250
Shale & Shells	1470
Shale, Sand & Gyp.	1595
Shale	1640
Anhydrite	1675
Red Bed & Shale	1940
Red Bed, Shale & Lime	2220
Red Sand, Stone & Lime	2500
Salt & Shale	2575
Red Bed & Shale, Sandy	2725
Red Sandstone & Lime Pyrite Streaks	2890
Red Rock & Pyrite w/ Lime Streaks	2979
Red Sandstone, Shale & Shells	3050
Red Rock	3210
Red Rock & Shale	3300
Sandstone, Shale & Lime	3320
Gray Lime	3360
Shale & Lime	3420
Lime	4648
Gray Lime	4682
Lime	4754
Lime & Sandy Shale	4776
Lime w/ Shale Streaks	4802
Lime	4950
Lime & Shale	4998
Lime	5020
Lime & Shale	5115
Lime	5140
Mississippi Lime	5160
Red & Black Shale & Lime	5204
Lime	5258
Mississippi	5279
Lime	5282

STATE OF KANSAS )  
                          ) ss:  
COUNTY OF RUSSELL )

I hereby certify that the above information is true and correct to the best of my knowledge.

C.T. Hunsaker  
Drilling Superintendent

Subscribed and sworn to before me this 20th day of December,

Jersey Dick  
Notary Public

My commission expires: 10-17-63

