

TO: STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-015-21320-00-00  
Spot: N2SWSW Sec/Twnshp/Rge: 32-23S-5E  
974 feet from S Section Line, 4537 feet from E Section Line  
Lease Name: WIEBE Well #: 1  
County: BUTLER Total Vertical Depth: 2725 feet

Operator License No.: 5360  
Op Name: BRANDT PRODUCTION COMPANY, IN  
Address: 550 N. 159 ST. E. #212  
WICHITA, KS 67230

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP	4.5	2422		Cornish Wireline
SURF	8.625	125		125 SX
PROD	4.5	2515		50 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 09/21/2011 9:00 AM  
Plug Co. License No.: 33961 Plug Co. Name: CONSOLIDATED OIL WELL SERVICES LLC  
Proposal Rcvd. from: GARY L. REED AS AGENT Company: \_\_\_\_\_ Phone: (316) 655-8775

Proposed Plugging Method: SET CAST IRON BRIDGE PLUG AT 2465'. DUMP BAIL 2 SX CEMENT ON TOP OF CIBP. PERFORATE 4.5" CASING 250' - 250.5". CIRCULATE CEMENT TO FILL ANNULUS AND 4.5" CASING FROM 250' TO SURFACE. CUT OFF CASING BELOW PLOW DEPTH.

Plugging Proposal Received By: \_\_\_\_\_ Witness Type: COMPLETE (100%)  
Date/Time Plugging Completed: 09/21/2011 9:00 AM KCC Agent: PATRICK SHIELDS

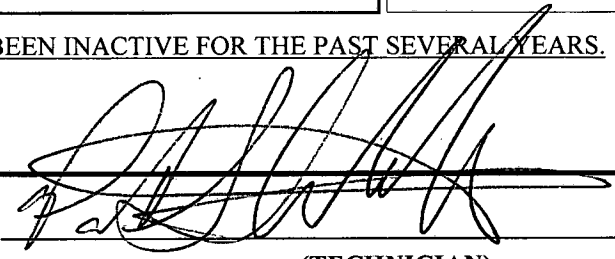
Actual Plugging Report:  
A CAST IRON BRIDGE PLUG WAS SET 50' ABOVE THE TOP OF THE PERF @ 2422' AND CAPPED WITH 2SX. CASING WAS PERFORATED @ 250' AND 101 SX OF 60X40 POS 4% GEL WAS CIRCULATED FROM 250' TO SURFACE. THE CASING WAS CUT OFF BELOW TILLABLE DEPTH. CONSOLIDATED TICKET NUMBER #31712.

Perfs:

Top	Bot	Thru	Comments
2471	2476	CSG	

Remarks: BRANDT PRODUCTION COMPANY HAS BEEN INACTIVE FOR THE PAST SEVERAL YEARS.  
Plugged through: CSG

District: 02

Signed   
(TECHNICIAN)

RECEIVED  
OCT 24 2011  
KCC WICHITA  
Form CP-2/3  
10/27/11

JK