

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-155-21451-00-00
Spot: W2 NE NW SW Sec/Twnshp/Rge: 17-22S-8W
2310 feet from S Section Line, 4290 feet from E Section Line
Lease/Unit Name: MORGAN-YEAKEL UNIT Well Number: 1
County: RENO Total Vertical Depth: 3532 feet

Operator License No.: 5003
Op Name: MCCOY PETROLEUM CORPORATION
Address: 453 S. WEBB RD. STE 310 PO BOX 78020
WICHITA, KS 67278

Conductor Pipe: Size feet: 8 1/4" 79
Surface Casing: Size 8.625 feet: 253 185 SX CMT
Production: Size 5.5 feet: 3633 100 SX CMT
Liner: Size feet:

Well Type: OIL UIC Docket No: Date/Time to Plug: 02/07/2002 10:00 AM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: JOE MASE Company: QUALITY WELL SERVICE Phone: (620) 727-3410

Proposed Plugging Method: See actual report.

Plugging Proposal Received By: JACK LUTHI Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 02/07/2002 4:30 PM KCC Agent: JACK LUTHI

Actual Plugging Report:

Sanded bottom to 3380' and 5sxs of common shot 5 1/2" casing off at 2900'. Pulled to 1350', pumped 35sxs, pulled to 900'. Pumped 35sxs, pulled to 300', circulated cement to surface.

RECEIVED
KCC DISTRICT #2

FEB 27 2002

02-27-02

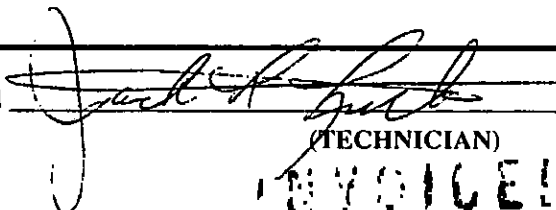
WICHITA, KS

Remarks: ALLIED # 8519.60/40 4% GEL.

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)

RECEIVED

Mar 08 2002

2002061506