


15-071-20082-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION  
P. O. BOX 17027  
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

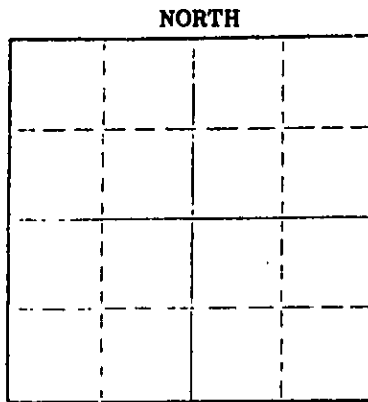

Locate well correctly on above Section Plat

Greeley County, Sec. 12 Twp. 19S Rge. (E) 40 (W)  
Location as "NE/CNW/SE" or footage from lines C SE  
Lease Owner DORCHESTER EXPLORATION INCORPORATED  
Lease Name Metcalf Well No. 1  
Office Address 1204 Vaughn Building, Midland, Texas 79701  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 8-6 1975  
Application for plugging filed 8-6 1975  
Application for plugging approved 8-6 1975  
Plugging commenced 8-6 1975  
Plugging completed 8-6 1975  
Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.  
If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazor  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3000 Feet  
Show depth and darkness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Surf. Soil	Surface	246	8-5/8"	238'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Plug At 1100', 80 sx cement,  
Plug at 240', 1/2 sx hulls, 30 sx cement,  
Plug at 40', 10 sx cement.

RECEIVED  
STATE CORPORATION COMMISSION

AUG 15 1975

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor D N B DRILLING, INC.  
Address 701 First National Building  
Wichita, Kansas 67202  
STATE OF KANSAS COUNTY OF \_\_\_\_\_  
JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson

701 First Nat'l Bldg., Wichita, Ks.  
(Address)

Subscribed and Sworn to before me this 14th day of August 1975

My commission expires August 25, 1976

Ella Priess  
Notary Public.

Ella Priess  
STATE NOTARY PUBLIC  
Sedgwick County, Kansas  
My Com. Expires Aug. 25, 1976

15-071-20182-00-00

DRILLERS' LOG

DORCHESTER EXPLORATION INCORPORATED

No. 1 Metcalf  
C 8E, Sec. 12-19S-40W  
Greeley County, Kansas

Elev: 3559 K.B.

Commenced: 8-2-75

Completed: 8-6-75

Surface Casing: 238' of  
8-5/8" cemented w/175 sk  
common cement, 2 1/2 Gal, 3 1/2 cc.  
8-2-75

FORMATION

DEPTH

Surface Hole	0 - 246
Shale	246 - 1915
Shale & Lime	1915 - 2395
Shale	2395 - 2503
Anhydrite	2503 - 2527
Lime & Shale	2527 - 3000 RFD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

*James L. Donelson*  
JAMES L. DONELSON

RECEIVED  
STATE COMMISSION

AUG 15 1975

CONSERVATION DIVISION  
Wichita, Kansas

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 14th day of August, 1975.

My Commission Expires:  
August 25, 1976

*Ella Priess*  
Ella Priess, Notary Public

<i>Ella Priess</i>
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Com. Expires Aug. 25, 1976