

15-071-20276-00-00

RECEIVED
STATE CORPORATION COMMISSION FORM CP-4
MAR 1 1983
CONSERVATION DIVISION
Wichita, Kansas
03-01-83

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Greeley County, Sec. 36 Twp. 19S Rge. 41 XX/W
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines _____


C NW NE
Lease Owner PAR Petroleum, Inc.
Lease Name Padgett Well No. 1
Office Address P. O. Box 280, Liberal, Kansas 67901
Character of Well (Completed as Oil, Gas or Dry Hole) _____
dry hole

Date Well completed February 15 1983
Application for plugging filed February 16 1983
Application for plugging approved verbal agreement 19____
Plugging commenced February 16 1983
Plugging completed February 16 1983
Reason for abandonment of well or producing formation _____
non-commercial production

If a producing well is abandoned, date of last production _____
19____

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Steve Durant
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2934'
Show depth and thickness of all water, oil and gas formations.

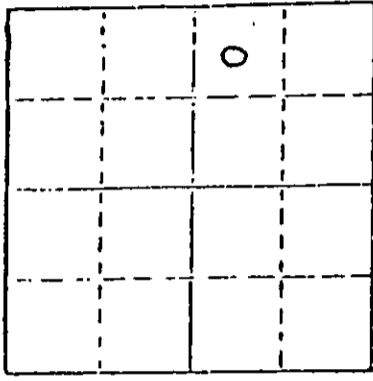

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	293'	none
				4 1/2"	2933'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Set cast iron bridge plug on wireline at 2904'. Ran in hole with tubing to 2904'; filled casing from 2904' to surface with mud; spot 25 sx cement plug through tubing from 2904' to 2659'; spot 25 sx cement plug through tubing from 330' to 85'; spot 10 sx cement plug through tubing from 40' to surface.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services

STATE OF Kansas COUNTY OF Seward, ss.
Rodney R. Reynolds (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Rodney R. Reynolds
P. O. Box 280, Liberal, Kansas 67901
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of February, 1983.

Marjorie A. Kennedy
Marjorie A. Kennedy, Notary Public.

My commission expires January 8, 1984

