

15-171-20034-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Scott County. Sec. 26 Twp. 19S Rge. (E) 31 (W)
Location as "NE/CNW/SW" or footage from lines C NE NW
Lease Owner Thunderbird Drilling, Inc.
Lease Name Mueller Well No. 1
Office Address 4328 E. Kellogg, Wichita 67218
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 9, 1972
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced January 9, 1972
Plugging completed January 9, 1972
Reason for abandonment of well or producing formation Dry Hole

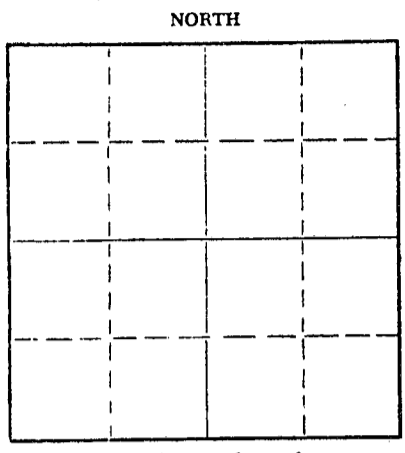

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (Edgar Eves of Sublette)

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 4800 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	446'	8-5/8"	446'	None
	Casing					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy Mud from Total Depth to 1200 Feet,
110 sax Cement Plug; Mud to 475 Feet,
30 sax Cement Plug; Mud to 40 Feet,
1/2 sax Halls & Plug bridged & 10 sax
Cement to Base of Cellar; 2 sax Cement
in Rat Hole. Job Completed @ 12:00 Noon
by Globe.

RECEIVED
STATE CORPORATION COMMISSION
JAN 13 1972
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Globe Oilwell Cementing, Inc.
Address Box 628, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, SS.
Clarence Michael of Sage Drilling Co. (employee of owner or owner's operator) of the above described

well being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Clarence Michael
500 Bitting Bldg., Wichita, Kansas
(Address)



Subscribed and sworn to before me this 11th day of January, 1972.
November 26, 1974.
Louise K. Whitted - Notary Public.

15-171-20034-00-00

RECEIVED
STATE CORPORATION COMMISSION
JAN 13 1972
CONSERVATION DIVISION
Wichita, Kansas

DRILLERS LOG
MUELLER NO. 1

CASING RECORD:	OPERATOR:	Thunderbird Drilling, Inc.	DESCRIPTION:
8-5/8" @ 446' w/330 sax cement	CONTRACTOR:	Sage Drilling Co., Inc.	C NE NW Sec. 26-19S-31W Scott County, Kansas
TOTAL DEPTH: 4800'	COMMENCED:	December 28, 1971	
	COMPLETED:	January 9, 1972	

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Surface Soil	0	40	
Top Soils & Blue Clay	40	450	
Blue Shale	450	1080	
Shells & Shale	1080	1735	
Shale & Lime	1735	2515	
Lime	2515	2527	
Lime & Shale	2527	3006	
Lime	3006	4800	D&A

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Clarence Michael
Clarence Michael



Subscribed and sworn to before me this 11th day of January, 1972.

Louise K. Whitted
Louise K. Whitted, Notary Public

My commission expires:
November 26, 1974.