

NOTICE OF INTENTION TO DRILL

(see rules on reverse side)

✓ DA

Expected Spud Date... April 14, 1988
month day year

API Number 15- 071-20,452-00-00

OPERATOR: License # 5152
Name Lee Banks d/b/a Banks Oil Co.
Address 200 West Douglas, Suite 550
City/State/Zip Wichita, Kansas 67202
Contact Person Lee Banks
Phone 316-267-0783

— East
NW Sec. 23 Twp. 20S. S, Rgt. 3 XX West
4409 Ft. from South Line of Section
4290 Ft. from East Line of Section

(Note: Locate well on Section Plat on reverse side)

CONTRACTOR: License # 6033
Name Murfin Drilling Company
City/State Wichita, Kansas 67202

Nearest lease or unit boundary line 330 feet
County Greeley
Lease Name Young Well # 1

Well Drilled For: Well Class: Type Equipment:
 Oil — Storage — Infield — Mud Rotary
 Gas — Inj — Pool Ext. — Air Rotary
— OWWO — Expl — Wildcat — Cable

Ground surface elevation 3839 feet MSL
Domestic well within 330 feet: —yes no
Municipal well within one mile: —yes no
Depth to bottom of fresh water 200'
Depth to bottom of usable water 1200'
Surface pipe by Alternate: 1 — 2
Surface pipe planned to be set Min. 350'
Conductor pipe required no
Projected Total Depth 5350' feet
Formation Mississippi

If OWWO: old well info as follows:

Operator
Well Name
Comp Date Old Total Depth

I certify that well will comply with K.S.A. 55-101, et seq., plus eventually plugging hole to KCC specifications.

Date 4-11-88 Signature of Operator or Agent Title owner

For KCC Use:

Conductor Pipe Required feet; Minimum Surface Pipe Required 200 feet per Alt. 2


This Authorization Expires 10-11-88 Approved By KCH 4-11-88

EFFECTIVE DATE: 4-16-88

Must be filed with the K.C.C. five (5) days prior to commencing well
This card void if drilling not started within six (6) months of date received by K.C.C.

Important procedures to follow:

**A Regular Section of Land
1 Mile = 5,280 Ft.**

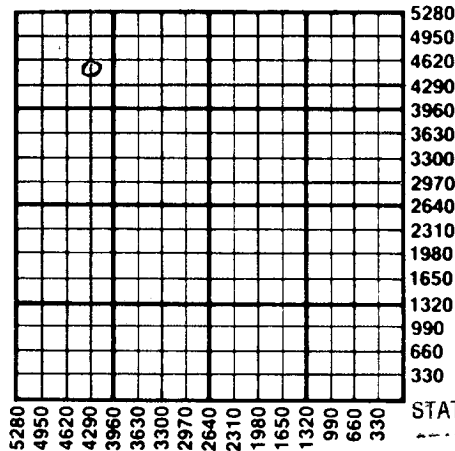

1. Notify District office before setting surface casing.
2. Set surface casing by circulating cement to the top.
3. File completion forms ACO-1 with K.C.C. within 120 days of well spud date, following instructions on ACO-1, side 1, and including copies of wireline logs.
4. Notify District office 48 hours prior to old well workover or re-entry.
5. Prior to filing Intent, prepare a proposed plugging plan in case well is D & A, then obtain approval of plan when calling district office prior to setting surface pipe.
6. Submit plugging report (CP-4) to K.C.C. after plugging is completed.
7. Obtain an approved injection docket number before disposing of salt water.
8. Notify K.C.C. within 10 days when injection commences or terminates.
9. If an alternate 2 completion, cement in the production pipe from below any usable water to surface within 120 days of spud date.

RECEIVED

STATE CORPORATION COMMISSION

APR 1 1 1988

CONSERVATION DIVISION
Wichita, Kansas

State Corporation Commission of Kansas
Conservation Division
200 Colorado Derby Building
Wichita, Kansas 67202-1212
(316) 263-3238