


Give All Information* Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

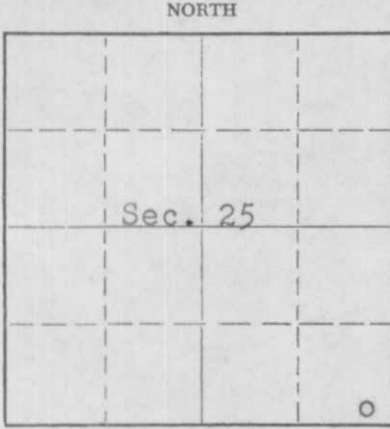

Locate well correctly on above Section Plat

BARBER County. Sec. 25 Twp. 33 Rge. 13 (X) W(W)
Location as "NE/CNW/SW" or footage from lines SE SE SE
Lease Owner PETROLEUM, INC.
Lease Name PAGE-HOLMES UNIT Well No. 1
Office Address ROUTE 2, GREAT BEND, KANSAS
Character of Well (completed as Oil, Gas or Dry Hole) GAS WELL
Date well completed August 21, 1956
Application for plugging filed January 6, 1957 58
Application for plugging approved January 7, 1957 58
Plugging commenced January 9, 1957 58
Plugging completed January 13, 1957 58
Reason for abandonment of well or producing formation Depletion of producible zones.
If a producing well is abandoned, date of last production June 1957
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives, Box 8, Pratt, Kansas
Producing formation Mississippi Depth to top 4530 Bottom ---- Total Depth of Well 4630 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
<u>Mississippi</u>	<u>Water and a little Gas</u>	<u>4533'</u>	<u>4546'</u>	<u>8-5/8"</u>	<u>301'</u>	<u>None</u>
<u>Kansas City</u>	<u>Water</u>	<u>4210'</u>	<u>4220'</u>	<u>5-1/2"</u>	<u>4626.33'</u>	<u>3850'</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

(Plugged back from 4630' to 4250')

Filled hole with crushed rock from 4250' to 4200'. Ran 5 sacks cement on top of crushed rock at 4200'. Mudded up with heavy mud to 300' and placed rock bridge at 300' followed by 20 sacks cement on top of rock bridge. Mud up to 35' and placed rock bridge at 35' followed by 10 sacks cement to base of well cellar.

RECEIVED
STATE CORPORATION COMMISSION

JAN 17 1958

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor MORGAN WELL PLUGGING SERVICE
Address 102 West 18th Street, Hutchinson, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
Don Searle (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Don Searle

Route 2, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 16th day of January, 19 58

Ed T. Brown
Notary Public.

My commission expires July 11, 1960

PLUGGING
FILE SEC 25 T 33 R 13
BOOK PAGE 74 LINE 12

WELL LOG

15-007-10325-0000

COMPANY PETROLEUM, INCORPORATED

SEC. 25 T. 33S R. 13W

FARM Page-Holmes NO. Unit #1


LOC. SE,SE,SE

TOTAL DEPTH 4620'

COUNTY Barber Col., Kansas

COMM. July 17, 1956 COMP. August 2, 1956

CONTRACTOR GARVEY DRILLING COMPANY



CASING 8 5/8" @ 301' W/225 sax.
5 1/2" @ 4626' W/100 sax.

ELEVATION 1530' DF

PRODUCTION Mississippian

FIGURES INDICATE BOTTOM OF FORMATIONS

303	Sand, shale & red bed	Elgin	3568'
890	Red bed and shale	Heebner	3745'
1800	Shale & shells	Douglas	3765'
2680	Shale & lime	Lansing	3930'
2845	Shale & shells	Miss.	4520'
3005	Shale & lime		
3080	Shells		
4040	Lime & shale		
4323	Lime		
4520	Shale & lime		
4620	Lime		
4620	T. D.		

RECEIVED
STATE CORPORATION COMMISSION

JAN 17 1958

CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC. 25 T. 33 R. 13W
BOOK PAGE 74 LINE 12

State of KANSAS }
County of BARTON } ss:

I, Verne A. Morris of Garvey Drilling Company

upon oath state that the above and foregoing is a true and correct copy of the log of the Page-Holmes Unit #1 well

Verne A. Morris

Subscribed and sworn to before me this 8th day of August 19 56

My Commission Expires: July 11, 1960

Led T. Brown
NOTARY PUBLIC