

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-095-19024-00-01
Spot: NWSE Sec/Twnshp/Rge: 33-30S-8W
1980 feet from S Section Line, 1980 feet from E Section Line
Lease Name: BLACKWELL Well #: 2
County: KINGMAN Total Vertical Depth: 4429 feet

Operator License No.: 33999
Op Name: LINN OPERATING, INC.
Address: 600 TRAVIS STE 5100
HOUSTON, TX 77002

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	8.625	265		
PROD	5.5	4394	1890	

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 11/30/2011 3:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE Phone: _____

Proposed Plugging Method: 35 SX 1200', 35 SX 800' CIRC 315'. SAND TO 4270 & 5 SKS

Plugging Proposal Received By: STEVE VANGIESON Witness Type: PARTIAL
Date/Time Plugging Completed: 11/30/2011 3:00 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

THE PERFS WERE COVERED WITH AND TO 4271' & CAPPED WITH 5 SKS CMT. THE CASING WAS RECOVERED FROM 1890' & PULLED TO 1200' WHERE 35 SXS OF CMT WAS SPOTTED. THE CASING WAS PULLED TO 800', WHERE 35 SXS OF CMT WAS SPOTTED. THE CASING WAS PULLED TO 315', WHERE CMT WAS CIRC'D TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
4324	4370	CSG	

Remarks: QUALITY WELL SERVICE 60/40 4% GEL

Plugged through: CSG

District: 02

Signed

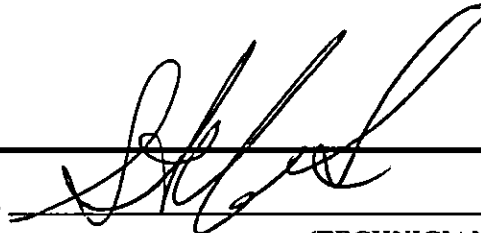

(TECHNICIAN)

RECEIVED
DEC 16 2011
12/23/11
Form CP-2/3
KCC WICHITA

JK