


15-203-20019-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
P. O. Box 17027  
Wichita, Kansas 67217

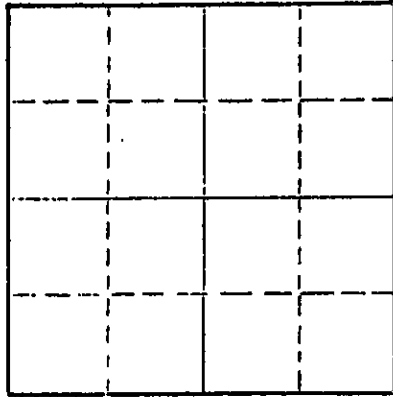

Locate well correctly on above  
Section Plot

Wichita County, Sec. 15 Twp. 17S Rge. (E) 36 (W)  
Location as "NE/CNW/SE" or footage from lines C SE SE  
Lease Owner Galaxy Oil Company  
Lease Name Smades Well No. 1  
Office Address 918 Lamar, Wichita Falls, Texas 76301  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed March 19, 1973  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced March 19, 1973  
Plugging completed March 19, 1973  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (W. L. Nichols, Morland)

Name of Conservation Agent who supervised plugging of this well  
Producing formation Depth to top Bottom Total Depth of Well 3050 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	307'	8-5/8"	307'	None
	Casing					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole Plugged as follows:  
Heavy Mud from Total Depth to 1125 Feet,  
110 sax Cement Plug; Mud to 315 Feet,  
30 sax Cement Plug; Mud to 40 Feet,  
1/2 sax Hulls, Plug Bridged and 10 sax  
Cement to Base of Cellar; 2 sax Cement  
in Rat Hole. Job Completed @ 11:15 P.M.


RECEIVED  
STATE CORPORATION COMMISSION  
MAR 23 1973  
CONSERVATION DIVISION  
Wichita, Kansas

Name of Plugging Contractor Dowell  
Address 1222 N. Calhoun, Liberal, Kansas 67901

STATE OF KANSAS COUNTY OF SEDGWICK  
Clarence Michael of Sage Drilling Co. (operator of the above described well)

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Clarence Michael  
500 Bitting Bldg., Wichita, Kansas  
(Address)



Sworn to before me this 21st day of March 1973  
November 26, 1974.  
Louise K. Whitted - Notary Public.

15-203-20019-00-00

RECEIVED  
STATE CORPORATION COMMISSION

MAR 23 1973

CONSERVATION DIVISION  
Wichita, Kansas

DRILLERS LOG

SMADES NO. 1

CASING RECORD:	OPERATOR:	Galaxy Oil Company	DESCRIPTION:
8-5/8" @ 307'	CONTRACTOR:	Sage Drilling Co.	C SE SE
w/200 sax cement	COMMENCED:	March 16, 1973	Sec. 15-17S-36W
TOTAL DEPTH:	COMPLETED:	March 19, 1973	Wichita County,
3050'			Kansas.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale & Sand	0	310	
Sand & Shale	310	2150	
Shale	2150	2460	
Shale & Lime	2460	2782	
Shale	2782	3050	D&A

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Clarence Michael  
Clarence Michael



Subscribed and sworn to before me this 21st day of March, 1973.

Louise K. Whitted  
Louise K. Whitted - Notary Public

My commission expires:  
November 26, 1974.