


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

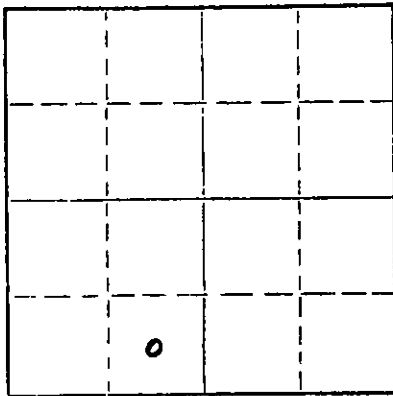

Locate well correctly on above Section Plat

Greeley County. Sec. 26 Twp 20 Rge. 41 (X) W (W)
Location as "NE/CNW/SE/SW" or footage from lines C SE SW
Lease Owner PAR Petroleum, Inc.
Lease Name Greamba Well No. 1
Office Address P.O. Box 280 Liberal, Kansas 67901
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 2-20-80 19
Application for plugging filed yes 19
Application for plugging approved yes 19
Plugging commenced 2-20-80 19
Plugging completed 2-20-80 @ 9.00 A.M. 19
Reason for abandonment of well or producing formation No Producing formations were encountered.
If a producing well is abandoned, date of last production None 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Gilbert Balthazov
Producing formation None Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Sand	water	0	257	8-5/8	257	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Cemented with 50-50 Posmix with 6% gel. 70 sx @ 950', 20 sx @ 40' and 5 sx in Rathole.

(Circular stamp: RECEIVED FEB 25 1980)

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor DNB Drilling Company
Address Wichita, Kansas

STATE OF Kansas, COUNTY OF Seward, ss.
Ralph M. Reynolds (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ralph M. Reynolds
P.O. Box 280 Liberal, Kan. 67901
(Address)

SUBSCRIBED AND SWORN TO before me this 22 day of February, 1980

Georgetta Taylor Notary Public.

My commission expires _____



15-071-20189-00-00

DRILLER'S LOG

Par Petroleum, Inc.
Greamba No. 1
C SE SW Sec. 26-20S-41W
Greeley Co., Ks.

Commenced: 2-13-80
Completed: 2-20-80

Surface Casing: 247' of 8-5/8"
cemented w/300 sx Class H, 1/4#
Flo seal, 3% cc

FORMATION

DEPTH

Surface Hole	0 - 257
Shale & Sand	257 - 1230
Sand & Clay	1230 - 2195
Shale	2195 - 2372
Anhydrite	2372 - 2393
Shale & Sand	2393 - 2460
Shale & Lime	2460 - 2580
Shale	2580 - 2875 RTD

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

Ella Priess

Ella Priess

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 21st day of February, 1980.

Dorothy L. Schmidt
Dorothy L. Schmidt, Notary Public

DOROTHY L. SCHMIDT
STATE NOTARY PUBLIC
Sedgwick County, Kansas
My Aopt. Exp. April 30, 1983