


15-171-00076-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

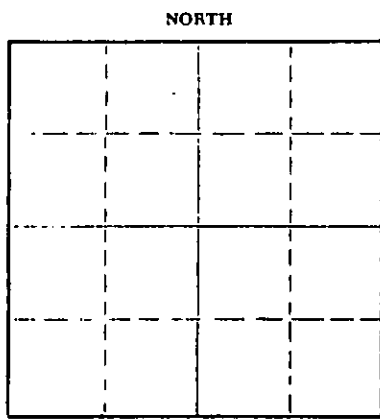

Locate well correctly on above  
Section Plat

Scott County, Sec. 18 Twp. 17 Rge. (X) 31 (W)  
Location as "NE/CNW&SW" or footage from lines  
Lease Owner D. R. Lauck Oil Company, Inc.  
Lease Name Brookover Well No. 1  
Office Address 301 So. Broadway Wichita, Kansas 67202  
Character of Well (completed as Oil, Gas or Dry Hole) Oil  
Date well completed July 10 19 63  
Application for plugging filed May 19 19 69  
Application for plugging approved May 20 19 69  
Plugging commenced May 21 19 69  
Plugging completed May 23 19 69  
Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production January 14 19 69  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. W. L. Nichols  
Producing formation Kansas City Depth to top 3929 Bottom 4308 Total Depth of Well 4777 Feet  
Show depth and thickness of all water, oil and gas formations. P.B. 4261

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Kansas City	Oil	3929	4308	8 5/8	276	None
Marmaton	Dry	4321	4489	5 1/2	4261	829
Mississippi	Dry	4576	4777			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plug at 4000  
 5 sacks Cement  
 15 sacks Jel Mud 950 to 625  
 9 sacks Jel Mud 625 to 335  
 20 sacks Cement 335 to 275  
 6 sacks Jel Mud 275 to 35  
 10 sacks Cement 35' to base of cellar

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 3 1969  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Glenn & Smith Pipe Pulling Company  
Address P. O. Box 156 Ellinwood, Kansas 67526


STATE OF Kansas COUNTY OF Barton ss.  
D. R. Lauck Oil Company, Inc. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *[Signature]*  
P. O. Box 488 Ellinwood, Kansas 67526  
(Address)

DEPOSED AND SWORN to before me this 29 day of May, 19 69

March 6, 1972

*[Signature]*  
Notary Public.



D. R. LAUCK OIL COMPANY, INC.

15-171-00076-00-00

Breakover #1

C SW SE Sec. 18-178-31W  
Scott County, Kansas

Commenced: June 5, 1968  
Completed: June 22, 1968

Casing Record: 276' 8-5/8" Cemented with 175 sacks Cement,  
4 sacks Calcium Chloride.  
4261' 5-1/2" Cemented with 95 sacks Cement.

Elevation: GR 2960; DP 2968; KB 2965.

DAY WORK

<u>DATE</u>	<u>DESCRIPTION</u>	<u>W/DP</u>	<u>WO/DP</u>	<u>TOTAL</u>
6-18-68	CFS 4288 DST #1 4188-4288	1-1/2 hrs. 9-1/2		
6-18-68	CFS 4871 DST #2 4542-4871	1-1/4 8		
6-19-68	CFS 4776 Schlumberger Elec. Log	1-1/2	7-1/2 hrs.	
6-20-68	WCO DST #3 3990-4040 (packer failed) DST #4 3990-4040 (packer failed) DST #5 3992-4036 (packer failed)	2 6 6 6		
6-21-68	DST #6 3990-4036 (packer failed) Waiting on Schlumberger to run Wire Line Test 8 Schlumberger Wire Line Test	8		
6-22-68	Schlumberger Wire Line Test		8	
		<u>61-3/4 hrs.</u>	<u>22-1/2 hrs.</u>	<u>84-1/4 hrs.</u>

RECEIVED  
STATE CORPORATION COMMISSION  
MAY 21 1969  
CONSERVATION DIVISION  
Wichita, Kansas

RTD 4776.