

ORIGINAL

15-171-20383-0000 RELEASED

SIDE ONE

SEP 24 1990

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION
WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY
DESCRIPTION OF WELL AND LEASE

S

API NO. 15-171-29,383-00-00

FROM CONFIDENTIAL

County... SCOTT

W/2 W/2 SE Sec. 27 Twp. 17S Rge. 31 East West

1320 Ft North from Southeast Corner of Section
2310 Ft West from Southeast Corner of Section
(Note: Locate well in section plat below)


Lease Name... GRUVER "O" Well #... 1

Field Name... WILDCAT

Producing Formation... --

Elevation: Ground... 2921 KB... 2926

Section Plat

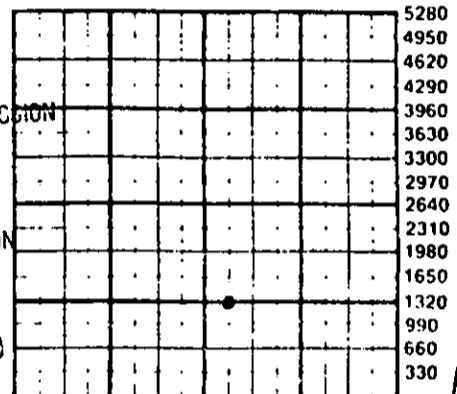

RECEIVED
STATE CORPORATION COMMISSION

JUN -2 1989

CONSERVATION DIVISION
Wichita, Kansas

JUN 06 1989

KANSAS GEOLOGICAL SURVEY
WICHITA BRANCH

ACT II
D5A

Operator: License # 3988
Name SLAWSON EXPLORATION COMPANY, INC.
Address 104 S. BROADWAY
City/State/Zip WICHITA, KS. 67202

Purchaser

Operator Contact Person Jim Remsberg
Phone (316) 263-3201

Contractor: License # 6039
Name L. D. Drilling, Inc.

Wellsite Geologist George Mueller
Phone (316) 262-7181

Designate Type of Completion
 New Well Re-Entry Workover
 Oil SWD Temp Abd
 Gas Inj Delayed Comp.
 Dry Other (Core, Water Supply etc.)
If OWNO: old well info as follows:

Operator
Well Name
Comp. Date Old Total Depth

WELL HISTORY

Drilling Method:
 Mud Rotary Air Rotary Cable

4-17-89 4-26-89 4-26-89
Spud Date Date Reached TD Completion Date

4590'
Total Depth PBDT

Amount of Surface Pipe Set and Cemented at 350' feet
Multiple Stage Cementing Collar Used? Yes No
If yes, show depth set... feet
If alternate 2 completion, cement circulated from... feet depth to... w/... SX cmt
Cement Company Name
Invoice #

WATER SUPPLY INFORMATION
Disposition of Produced Water: Disposal
Docket # Repressuring

Questions on this portion of the ACO-1 call:
Water Resources Board (913) 296-3717
Source of Water:
Division of Water Resources Permit # 109-26
Groundwater... Ft North from Southeast Corner (Well) ... Ft West from Southeast Corner of Sec Twp Rge East West
Surface Water... Ft North from Southeast Corner (Stream, pond etc) ... Ft West from Southeast Corner Sec Twp Rge East West
 Other (explain) Irrigation well (purchased from city, R.W.O. #)

INSTRUCTIONS: This form shall be completed in triplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 120 days of the spud date of any well. Rule 82-3-130, 82-3-107 and 82-3-106 apply. Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months. One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature James C. Remsberg
Title James C. Remsberg, Operations Mgr Date 05-08-89

Subscribed and sworn to before me this 8th day of May 1989
Notary Public Elizabeth Cochran

Date Commission Expires



K.C.C. OFFICE USE ONLY
 Letter of Confidentiality Attached
 Wireline Log Received
 Drillers Timelog Received
Distribution
 KCC SWD/Rep NGPA
 KGS Plug Other (Specify)

Sec. 27 Twp. 17 Rge. 31

CONFIDENTIAL

Operator Name SLAWSON EXPLORATION COMPANY, INC Lease Name GRUVER "Q" Well #

Sec. 27 Twp. 17-S Rge. 31 East West County SCOTT RELEASED

SEP 24 1990

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

FROM CONFIDENTIAL

Drill Stem Tests Taken [X] Yes [] No
Samples Sent to Geological Survey [X] Yes [] No
Cores Taken [] Yes [X] No

Formation Description [] Log [] Sample

Name Top Bottom

ELEVATION: 2921 GR 2926 KB

FORMATION DATA:

Log Tops:

Table with 2 columns: Formation Name, Elevation. Includes Anhy, B/Anhy, Wab, Heeb, Lans, Mun Cr, Base K/C, Marm, Paw, FS, L/Cher, JZ, Miss, Log TD.

DST #1 3940-3963' (35' Zn). 30-45-20-20. Wk bl, died. Rec: 1' free oil, 44' SOCM. IFP 34-36, ISIP 1074, FFP 46-46, FSIP 1029, HP 2001-1992.
DST #2 4004-4017' (70' Zn). 30-20-20-20. VWBTO. Rec: 65' mud w/spots oil. IFP 30-35, ISIP 791, FFP 42-42, FSIP 754.
DST #3 4094-4135' (140' Zn). 30-45-45-60. SBTO. Rec: 61' mud w/tr oil, 122' mdy sulphur wtr, 1423' sulphur wtr. IFP 46-394, ISIP 1104, FFP 405-743, FSIP 1104.
DST #4 4289-4332' (PLEAS Zn). Packer failure
DST #5 4293-4332' (PLEAS Zn). Packer failure

CASING RECORD, PERFORATION RECORD, TUBING RECORD, Date of First Production, Producing Method, Estimated Production Per 24 Hours

METHOD OF COMPLETION

Production Interval

Disposition of gas: [] Vented [] Sold [] Used on Lease [] Open Hole [] Perforation [] Other (Specify) [] Dually Completed [] Commingled

ORIGINAL

9/5/90

15-171-20383-00-00 RELEASED

SEP 24 1990

DRILLERS WELL LOG

FROM CONFIDENTIAL

DATE COMMENCED: 4-17-89
DATE COMPLETED: 6-26-89

SLAWSON EXPLORATION COMPANY, INC.
GRUVER "O" #1
W/2 W/2 SE/4 Sec. 27-17-31
Scott County, Ks.

0 - 350 Surface
350 - 785 Clay & shale
785 - 1608 Clay
1608 - 2810 Shale
2810 - 3770 Lime & Shale
3770 - 3963 Lime
3963 - 4590 Lime & Shale
RTD 4590

ELEVATION: 2921 GR 2926 KB

FORMATION DATA:

Log Tops:

Anhy 2268 (+658)
B/Anhy 2286 (+640)
Wab 3501 (-575)
Heeb 3880 (-854)
Lans 3922 (-996)
Mun Cr 4101 (-1175)
Base K/C 4289 (-1363)
Marm 4320 (-1394)
Paw 4418 (-1492)
FS 4460 (-1543)
L/Cher 4482 (-1556)
JZ 4522 (-1596)
Miss 4554 (-1628)
Log TD 4589 (-1663)

SURFACE CASING:

8 5/8" set at 350' W/185 sx. 60/40
Pozmix, 2% Gel, 3% CC

RECEIVED
STATE CORPORATION COMMISSION

MAY 5 1989

CONSERVATION DIVISION
Wichita, Kansas

MAY 12 1989

KANSAS GEOLOGICAL SURVEY
WICHITA BRANCH

A F F I D A V I T

STATE OF KANSAS) ss
COUNTY OF BARTON)

L. D. DAVIS of lawful age, does swear and state that the facts and statements herein are true and correct to the best of his knowledge.

L. D. Davis
L. D. Davis

Subscribed and sworn to before me this 3rd day of May, 1989.

My Commission expires: 5-20-89

Bessie M. DeWerff
Notary Public - Bessie M. DeWerff

