
15-171-20027-00-00 FORM CP-3

KANSAS

Rev. 6-4-68

J. Lewis Brock Administrator 500 Insurance Building Wichita, Kansas 67202

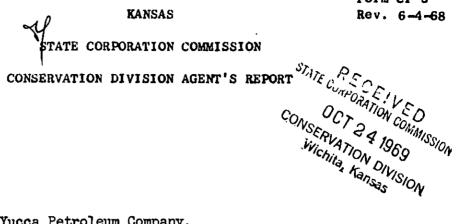

Operator's Full Name	Yucca Petroleum Compa	ny,			- 1i
Complete Address	Box #2585, Amarillo,	Texas.		<del></del> .	
Lease Name	Miller	Well No.	1	·	·
Location	CSW-SW	Sec. 28 Twp.	19_Rge	(E)	(w)_33
County	Scott	Total	Depth	48501	·
Abandoned Oil Well	Gas Well I	nput WellS	WD Well_	D &	A <u>X</u>
Other well as hereafter indicated					
Plugging Contractor	Leben Drilling, Incor	porated.			<del></del>
Address	Box #486, Great Bend,	Kansas. Lic	ense No		
Operation Completed:	Hour 10:30 AM Day_	19 Month	10	Year	1969
The above well was plugged as follows:					
367:-8 5/8" Surface casing, cement circulated with 270 Sx. Top of Dakota section @ 700'.					
Circulated hole with heavy mud. Pulled DP to 1000' and displaced 125 Sx. cement thru					
DP from 1000' to 600'. Pulled DP to 400' and displaced 25 Sx. cement thru DP from					
400' to 320'. Pulled DP, set bridge @ 40' with 2 sack hulls and 10 Sx. cement to					
bottom of cellar.					
I hereby certify that t	he above well was plug	Signed:	atéd.	J. Superviso	chale.
NW. 330.	721-W_				