

State of Kansas



FORM CP-2

15-169-20171-00-00

JOHN CARLIN
R. C. LOUX
JANE T. ROY
PHILLIP R. DICK
CAROL J. LARSON

Governor
Chairman
Commissioner
Commissioner
Executive Secretary

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

200 Colorado Derby Building
WICHITA, KANSAS 67202

April 16, 1982

RECEIVED
STATE CORPORATION COMMISSION

APR 20 1982
04-20-1982
CONSERVATION DIVISION
Wichita, Kansas

VERBAL PERMIT FORM
(To be filed by Plugging Agent)

Dear Sir:

Mr. Tim Zulkoski of Range Drilling Co, Inc. has this date requested permission to plug the following described well:

Operator's Full Name: Gear Petroleum Company, Inc.

Complete Address: 300 Sutton Place, Wichita, Kansas 67202

Lease Name: Olsson Well No. 1-22

Location: SF SW NE Sec. 22 Twp. 16 Rge. 2 (E) (W)

County: Saline Total Depth: 3590'

Abandoned Oil Well Gas Well Input Well SWD Well D&A

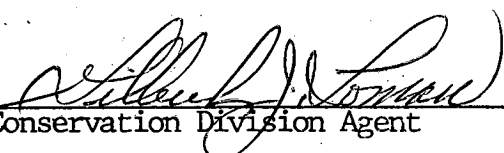
Other well as hereafter indicated: _____

Mr. Zulkoski was instructed to plug the well as follows:

Circulate hole and fill with mud. Pump 40 sacks cement through drill pipe at 420'. Pump 50 sacks cement through drill pipe at 270'. Fill hole with mud to 40'. Push plug and 1/2 sack hulls to 40' and cap hole with 10 sacks cement. Cement rat hole with 10 sacks cement.

Orders by Marion Schmidt

Very truly yours,


Conservation Division Agent