

15-169-00674-00-00


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Saline County. Sec. 28 Twp. 14 Rge. (E) 2 (W)

Location as "NE/CNW/SW" or footage from lines SEC NW/4
Lease Owner Lucian Walker
Lease Name Wuerth Well No. 1
Office Address 1025 Mayo Bldg., Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 12, 1961
Application for plugging filed June 12, 1961
Application for plugging approved June 12, 1961
Plugging commenced June 12, 1961
Plugging completed June 12, 1961
Reason for abandonment of well or producing formation Dry Hole

NORTH

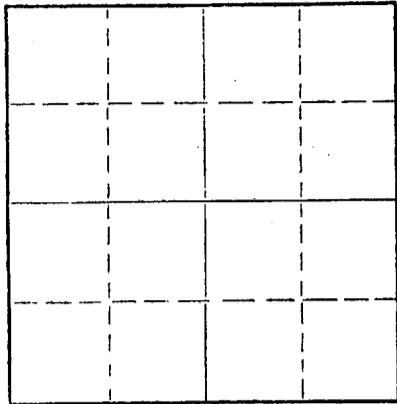

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert P. Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3299 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	274'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Hole filled with heavy rotary mud to 250 feet. Bridge at 250 feet with 20 sacks cement on bridge. Hole filled with heavy rotary mud to 35 feet. Bridge at 35 feet with 10 sacks cement on bridge. Rat hole filled with heavy rotary mud and capped with 2 sacks cement.


RECEIVED
STATE CORPORATION COMMISSION
JUN 15 1961
Conservation Division
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor White & Ellis Drilling, Inc. - License #209
Address Box 448, El Dorado, Kansas

STATE OF Kansas, COUNTY OF Butler, ss.
Ernest Sifford, employee of Contractor ~~(employee of contractor) or (owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Ernest Sifford
Box 448, El Dorado, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of June, 1961



My commission expires September 26, 1961
L. B. Auer Notary Public.

15-189-00674-00-00

Casing Record

8 5/8

274' Cemented
w/175 sacks

Location: SEc NW/4
Section: 28-14-2W
Saline County, Kansas
Farm: Wuerth #1
Well Owner: Lucian Walker
Contractor: White & Ellis Drig., Inc.
Started: 6/5/61
Completed: 6/12/61

T.D.	3299'
Kelly Bushing Measurement 5' above ground level.	
FORMATION	DEPTH
Soil	0-10
Shale & Lime	295
Red rock	305
Anhydrite	370
Red rock	395
Lime & Shale stks.	1610
Lime	1885
Shale & Lime	2013
Lime	2240
Lime & Shale stks.	2470
Shale & Lime	2643
Lime	2910
Lime & Shale	3015
Shale & Lime	3043
Lime	3092
Shale	3222
Dolomite	3299

TOPS

Kansas City	2013
Mississippi	2680
Hunton	3043
Viola	3222

Dry Hole
Plugged & Abandoned

RECEIVED
STATE CORPORATION COMMISSION

JUN 19 1961

CONSERVATION DIVISION
Wichita, Kansas