


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Hamilton County, Sec. 33 Twp. 25S Rge. 42 (W)
SE NW SE

Location as "NE/CNW/SW" or footage from lines
Lease Owner Champlin Petroleum Company
Lease Name Michae B. Sanders Well No. 1
Office Address P. O. Box 308, Ellinwood, Kansas 67526
Character of Well (completed as Oil, Gas or Dry Hole) Lost Hole - D&A
Date well completed February 6 19 70
Application for plugging filed February 6 19 70
Application for plugging approved February 6 19 70
Plugging commenced February 6 19 70
Plugging completed February 6 19 70
Reason for abandonment of well or producing formation

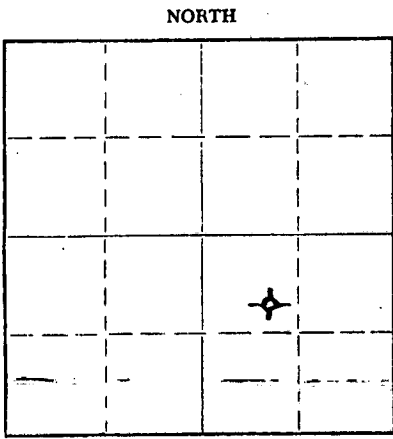

NORTH
Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves
Producing formation Depth to top Bottom Total Depth of Well 3660 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	STATE CORPORATION COMMISSION RECEIVED FEB 10 1970 CONSERVATION DIVISION Wichita, Kansas			8 5/8" OD	730'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with mud from 3660' to 700' and pumped in 45 sacks of cement filling hole to 600' then filled with mud from top of cement to 45' and used 15 sacks of cement to fill hole from 45' to surface. Job complete at 7:30 a.m. 2/6/70.

Unable to get around drill collars lost in hole.

To skid rig 150' east and redrill this well.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Service Drilling Company
Address 406 So. Boulder, Tulsa, Oklahoma

STATE OF Kansas, COUNTY OF Barton, ss.
J. W. Meyers (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. W. Meyers, District Operations Manager
P. O. Box 308, Ellinwood, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 9th day of February, 19 70



N. Kenneth Stivers Notary Public.

33-25-42W

CHAMPLIN PETROLEUM COMPANY

MICHAEL B. SANDERS #1
Hamilton County, Kansas

RECEIVED
STATE CORPORATION COMMISSION
MAR 16 1970
CONSERVATION DIVISION
Wichita, Kansas

COMMENCED OPERATIONS: 1-16-70
COMPLETED OPERATIONS: 2-6-70

DRILLERS LOG

1-16-70	0 - 444	Sand, Gypsum & Red Bed.
1-17-70	444 - 731	Sand, Gypsum & Red Bed.
1-18-70	731 - 1290	Red Bed.
1-19-70	1290 - 2220	Red Bed, Sand, Shale & Anhydrite.
1-20-70	2220 - 2838	Anhydrite, Shale, Sand & Lime.
1-21-70	2838 - 3185	Shale, Anhydrite & Lime.
1-22-70	3185 - 3392	Shale & Lime.
1-23-70	3392 - 3660	Shale & Lime.
2-4-70	3660 - 3212	Lime & Gypsum.
2-5-70	3212 - 3259	Lime & Gypsum.

CASING RECORD

1-17-70 Ran 18 jts. 20# 8 5/8" casing. Set @ 732'.
Cemented with 220 sacks lt. wt., 2% c.c.
and 100 sacks common, 2% cc.

2-6-70 ~~Ran drill pipe.~~ Spotted 35 sacks pozmix
@ 700', 15 sacks @ 45' and spotted top plug.