

15-169-19033-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

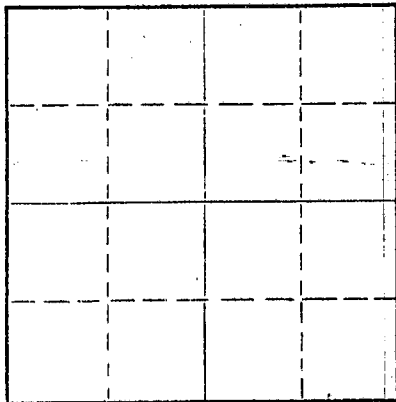

Locate well correctly on above
Section Plat

Saline County, Sec. 20 Twp. 14 Rge. 2 W (E) (W)
Location as "NE/CNW%SW%" or footage from lines C SE NE
Lease Owner Cal Jones
Lease Name Peterson Well No. b-1
Office Address Canton, Kansas 67428
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed 7-26 1963
Application for plugging filed 4-29 19 69
Application for plugging approved 5-1 19 69
Plugging commenced 5-1 19 69
Plugging completed 5-13 19 69
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation Depth to top Bottom Total Depth of Well 3276' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				7" #11		2,718'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sand. Sand from 3276 to 3250/ Dumped 6 sx of cement. Mudded hole to 170'. Made 10' of rock bridge. Dumped 30 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 15 sx of cement, filling to the bottom of the cellar.

RECEIVED
STATE CORPORATION COMMISSION
MAY 20 1969
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Co.
Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas, COUNTY OF Reno, ss.
Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb
2809 King St Hutchinson, Kansas 67501
(Address)

Subscribed and sworn to before me this 13th day of May, 19 69
My commission expires January 5, 1970
Judy Lamb Notary Public.



WELL RECORD

15-169-19033-00-00

LEASE: Peterson "B"

WELL NO. 1

LOCATION: GSE NE, Sec. 20-14-2W

COLLECTED 8/17/63

COUNTY - Saline

COMPLETED 7/26/63
(rotary)

OPERATOR: Cal Jones

Elev. 1306 RB

CONTRACTOR: Holland Drilling Company, Inc.
1111 North Main Street
Hutchinson, Kansas

CASING RECORD: 10" @ 172' / 130sx
7" @ 3268' / 50sx

FORMATION	LOG
Sand, Shale & Shells	40
Shale & Shells	130
Anhydrite	172
Lime	320
Lime & Shale	780
Shale & Lime	1135
Shale & Shells	1855
Lime & Shale	2645
Shale & Shells	2665
Miss.	2911
Miss. Lime	3015
Shale	3080
Hunton Lime	3193
Shale	3263
Shale	3269
Maquoketa Dolomite	3276
RTD	3276

RECEIVED
STATE CORPORATION COMMISSION
AUG 1 1968
CONSERVATION DIVISION
Wichita, Kansas