

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

15-169-00414-00-00

API NUMBER 5-14-64

LEASE NAME Vanier

WELL NUMBER 2

330 Ft. from S Section Line

1980 Ft. from E Section Line

SEC. 17 TWP. 14 RGE. 2 (E) or (W)

COUNTY Saline

Date Well Completed 5-14-64

Plugging Commenced 5-16-88

Plugging Completed 5-17-88

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Scott's Well Service

ADDRESS Box 36, Roxbury, Ks 67476

PHONE# (913) 254 7828 OPERATORS LICENSE NO. 6819

Character of Well SWD

(Oil, Gas, D&A, SWD, Input, Water Supply Well)

The plugging proposal was approved on 5-18-88 (date)

by Shari Feist (KCC District Agent's Name).

Is ACO-1 filed? yes If not, is well log attached? _____

Producing Formation magooketa Depth to Top 3213 Bottom 3217 T.D. 3217

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
magooketa	dolomite	surface	3213	4"	3213'	40'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet each set.
Tried to run baler, had bridge at 40'. Hooked onto pipe and pipe was parted 40' down.
Pulled 1 joint and had 4 1/2 to 5 1/2 swedge on botton. Swedge was setting on 4 1/2 pipe in well.
(Well was an old producing well made into a disposal.) Ran baler down well and got inside old 4 1/2 pipe. Baled well to 550' and hit another bridge. Looked down well with mirror and pipe
(If additional description is necessary, use BACK of this form.) (on back)

Name of Plugging Contractor Scott's Well Service License No. 6819

Address Box 36, Roxbury, Ks 67476

NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Scott's Well Service

STATE OF Kansas COUNTY OF McPherson, ss.

Scott's Well Service

(Employee of Operator or (Operator) of

above-described well, being first duly sworn on oath, says: That I have known of the facts, statements, and matters herein contained and the log of the above-described well filed that the same are true and correct, so help me God.

(Signature) Jay Scott



(Address) Roxbury Ks Box 36

SUBSCRIBED AND SWORN TO before me this 3rd day of June, 19 88

Carol Decker

Notary Public

My Commission Expires: August 15, 1991

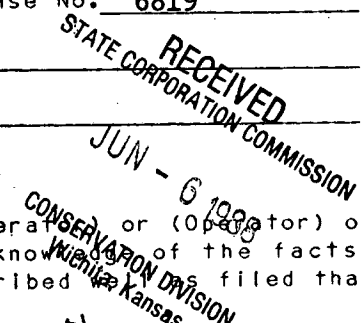

was in middle of hole. Put 5 yards redi-mix down well and pulled up to top of surface.

RECEIVED
MAY 10 1964
MAY 10 1964
MAY 10 1964

1964