

15-169-[00092]-00-0P

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Saline County. Sec. 9 Twp. 14 Rge. 2 (E) (W)

Location as "NE/CNW/SW" or footage from lines NE NE SW

Lease Owner Walter J. Nelson

Lease Name Roesner Well No. 1

Office Address Salina, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 3-7-63 19

Plugging completed 8-21-63 19

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

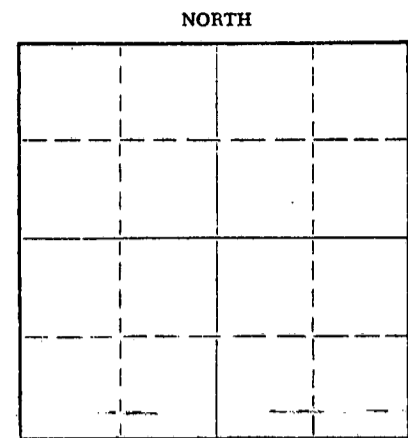

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3250 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	165'	None
				5-1/2"	3250'	498'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, sanded hole to 3008' and dumped 5 sacks of cement @ 3008' with dump bailer. Pulled 5 1/2" casing, bailed fluid to 170' set rock bridge to 155' and capped with 2 1/2 yards of ready-mix cement.

RECEIVED
STATE CORPORATION COMMISSION

AUG 29 1963

PLUGGING COMPLETE.

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss. Noel J. Knight

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight

Chase, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 27th day of August, 1963

Milton J. Volin Notary Public.

My commission expires May 20, 1964