

15-169-30051-00-00


Form CP-1

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Commission

P. O. Box 17027
Wichita, Kansas 67217

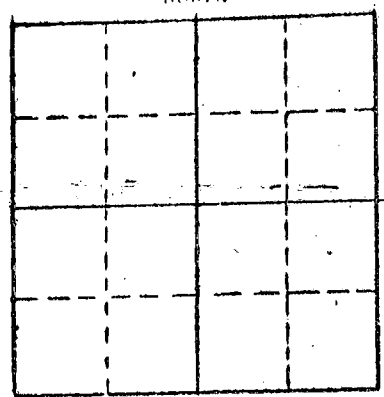

Locate well correctly on above
Section Plot

Saline County, Sec 8 Twp. 14 Rgc. 2 (E) (W)
SE NE
Location as "NE/CNWSW" or footage from lines
Lease Owner Raymond Oil Co., Inc.
Lease Name Graham #2 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 8/30/74 19
Plugging completed 9/11/74 19
Reason for abandonment of well or producing formation depleted.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Toman
Producing formation Depth to top Bottom Total Depth of Well 3144 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	207	none
				4 1/2"	3142	2508

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole, ran sand to 3125', loaded hole with water. Shot pipe at 2830', spotted 30 barrels oil. Shot pipe at 2708', 2608', 2507', pulled 78 joints. Bailed hole to 215', set rock bridge and ran 3 yards ready mix.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
OCT 1 1974
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor VOTH CASING PULLING
Address CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE ss.
WALTER VOTH (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Walter Voth
CHASE, KANSAS (Address)

Subscribed and Sworn to before me this 27th day of September 1974

MARGARET MELCHER
NOTARY PUBLIC
Rice County, Kansas
My Commission Expires
Feb. 15, 1975

Margaret Melcher
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas


COPY

15-169-30051-00-00
 SEC. 8 T. 14 R. 2W
 SE SE NE

Company. SUFFOLK OIL ASSOCIATES & TOM BROWN
 Farm. Graham No. 2

County Saline
 KANSAS

Total Depth. 3144 RTD 3165'
 Comm. 12-19-64 Comp. 12-31-64
 Shot or Treated.
 Contractor. Donald T. Ingling
 Issued. 4-24-65



Elevation. 1207' B.B.

Production. Pmp 25 BOPD & some frac wtr.

CASING:

8 5/8" 207' w/185 sx cem.
 4 1/2" 3142' w/50 sx cem.

Figures Indicate Bottom of Formations.

sand, surface clay	80
shale	90
shale, sand	155
shale, shells	215
red rock, shale	250
lime	800
shale, shells	1710
shale, lime strks	1910
lime, shale	2090
lime	2440
shale, lime strks	2580
lime, chert, shale strks	2630
Mississippi	2780
shale, lime strks	2835
lime, shale	2963
lime	3054
shale, Maquoketa top	3142 1/2
Maquoketa dolomite	3144 RTD
No log	3165
Total Depth	

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 23 1964
 CONSERVATION DIVISION
 Wichita, Kansas

TOPS: SCOUT
 Maquoketa 3162