

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

OR

FORMATION PLUGGING RECORD

Strike out upper line when reporting plugging of formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Saline

County. Sec. 32 Twp. 14S Rge. (E) 2 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NE/4 NE/4 NW/4

Lease Owner E.S. Adkins

Lease Name Weis

Well No. #1

Office Address 912 Philtower Bldg., Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry

Date well completed Dec. 3, 1942

Application for plugging filed Dec. 3, 1942

Application for plugging approved Dec. 3, 1942

Plugging commenced Dec. 3, 1942


Plugging completed 19

Reason for abandonment of well or producing formation

No oil or gas

If a producing well is abandoned, date of last production None 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well

Producing formation Depth to top Bottom Total Depth of Well Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out. The table is mostly empty with dotted lines for text entry.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from...feet to...feet for each plug set.

Filled with heavy rotary mud from 3470' up to 200'

Filled with cement from 200' to 170'

Filled with heavy rotary mud from 170' to 5' of surface

Cut off surface casing welded plate over top and dumped 5 sacks of cement in cellar on to top of surface casing.

PLUGGING
FILE SEC 32-T-14-R-242
BOOK PAGE 52 LINE 3

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to
Address

12-22-42

STATE OF Oklahoma, COUNTY OF Tulsa, ss.

J. Leighton Avery (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

J. Leighton Avery

(Address)

SUBSCRIBED AND SWORN to before me this 21st day of December, 1942.

Sara L. Mulford

Notary Public.

My commission expires


July 11, 1946



WEIS #1
NE/4 NE/4 NW/4 of Section 32-14S-2W
Saline County, Kansas
E.S. Adkins

Commenced: Nov. 12, 1942
Completed: Dec. 3, 1942

Shale and Shells	0	150
Gyp	150	162
Shale	162	174
Anhydrite	174	200
Lime	200	255
Anhydrite	255	275
Lime and shale	275	350
Lime and streaks of shale	350	530
Lime and shale	530	680
Broken lime	680	760
Sandy lime	760	810
Lime and shale	810	1045
Shale and shells	1045	1205
Lime and shale	1205	1650
Lime	1650	1830
Shale	1830	1840
Lime and shale	1840	2020
Shale	2020	2027
Lime (Top K.G. 2027)	2027	2080
Lime and shale	2080	2120
Broken lime	2120	2140
Lime	2140	2355
Lime and shale	2355	2575
Shale	2575	2625
Shale and shells	2625	2676
Lime and chat (Top Miss.2676)	2676	2678
Lime	2678	2768
Miss. Lime	2768	2795
Lime	2795	2935
Shale	2935	3068
Lime	3068	3112
Shale	3112	3120
Lime	3120	3170
Shale	3170	3233
Lime	3233	3270
Cherty lime	3270	3303
Lime (Top Arbuckle 3446)	3303	3470
Total Depth	3470	

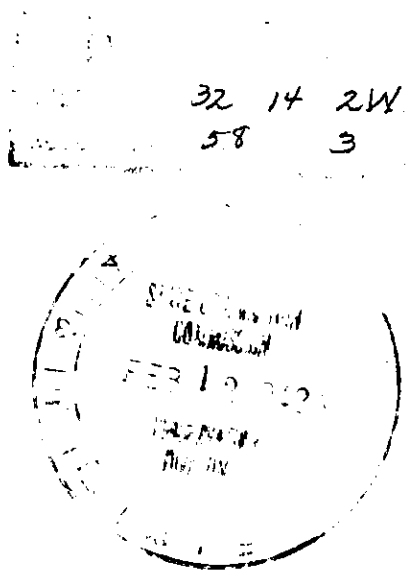

CASING RECORD

10-3/4" Casing set at 205' and cemented with 225 sacks of cement.

STATE OF OKLAHOMA)
) (SS
COUNTY OF TULSA)

I hereby affirm that the above and foregoing is a true and correct copy of the log of your Weis Well #1, located in the Northeast Quarter of Northeast Quarter of Northwest Quarter of Section 32, Township 14 South, Range 2 West, Saline County, Kansas.

HELMERICK & PAYNE, INC.

By (Sgd) WILLIAM BROADHURST
Treasurer

Subscribed and sworn to before me, a Notary Public, this 17th day of December, 1942.

My commission expires:
July 22, 1943

(Sgd) SUE GRIFFIN
Notary Public