


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

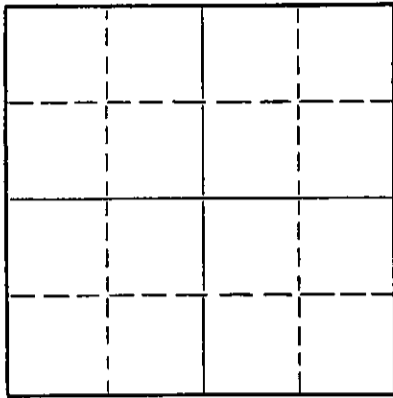

Locate well correctly on above
Section Flat

Saline County. Sec. 28 Twp. 16 Rge. 2 (X) (W)
Location as "NE/CNW/SE/SW" or footage from lines NE NE SW
Lease Owner T. A. Phillips
Lease Name T. E. Carlson Well No. 1
Office Address 535 State - Salina, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed September 6, 19 53
Application for plugging filed September 6, 19 53
Application for plugging approved September 6, 19 53
Plugging commenced September 6, 19 53
Plugging completed September 6, 19 53
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Water Maquoketa	water	3425	3451	8 5/8"	147'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Heavy mud to 140'
Bridging plug at 140' - 15 sax cement
Heavy mud to 25'
5 sax cement to surface

09-12-1953

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Shields Drilling Co., Inc.
Address Box 248 - Russell, Kansas


STATE OF Kansas, COUNTY OF Russell, ss.
R. J. Shields (employer or owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. E. Reiss - Supt.
Box 248 - Russell, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 9th day of September, 1953

My commission expires May 28 - 1955

Je Anne Logsdon Notary Public.



15-169-00141-00-00
WELL LOG

T. A. Phillips
CARLSON #1

NE NE SW
Sec. 28-16S-2W
Saline County, Kansas

Commenced: August 22, 1953
Completed: September 6, 1953
Total Depth: 3451'
Drilled By: Shields Drilling Co., Inc.

Elevation: 1347 O.L.
Treatment:
Production: D & A

CASING RUN

Size	Feet	Run or Cmtd.
8 5/8 "	145'	Cmtd. W/ 125 Sacks

-----Figures Indication of Bottom of Formation-----

Shale	245
Shale & Shells	269
Anhydrite	285
Broken Anhydrite	325
Shale & Lime	370
Red Bed & Shells	400
Shale & Shells	460
Lime & Shale	500
Shale & Shells	735
Lime & Shale	1100
Shale	1130
Shale & Salt	1180
Shale & Shells	1430
Lime & Shale	2000
Shale	2065
Shale & lime	2127
Shale	2195
Lime	2248
Shale & Lime	2320
Lime & Shale	2744
Shale	2843
Lime & Shale	2889
Lime	2949
Shale & Lime	2987
Lime & Shale	3042
Lime	3094
Shale & Lime	3125
Lime & Shale	3186
Shale	3238
Shale & Lime Streak	3295
Lime	3355
Shale	3425
Maquoketa Lime	3451
Lime & Shale	3451

09-12-1953
T. D.

TOPS

Maquoketa 3425'

PLUGGING
FILE SEC 28 T 16 R 2W
BOOK PAGE 128 LINE 21