

15-169-20098-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Saline County. Sec. 13 Twp. 16 Rge. 2 E/W
Location as "NE/CNW/SW" or footage from lines
NE SW NE

Lease Owner Gear Petroleum Co.
Lease Name Krauss Well No. 1
Office Address 300 Sutton Place, Wichita, Kansas
Character of Well (Completed as Oil, Gas or Dry Hole)

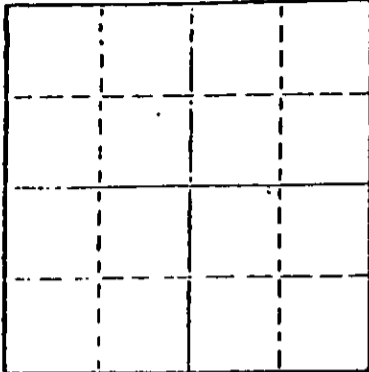

Locate well correctly on above
Section Plot

Dry Hole
Date Well completed 11-16 1979
Application for plugging filed 11-16 1979
Application for plugging approved 11-16 1979
Plugging commenced 11-16 1979
Plugging completed 11-16 1979
Reason for abandonment of well or producing formation

Dry Hole
If a producing well is abandoned, date of last production
N/A 19
Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Towman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 2760
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	172'	Cemented to surface.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with 60 viscosity rotary mud from T.D.
to 200'. Put in bridge, 1/4 sacks hulls and 25 sacks
cement. Filled with mud to 40'. Put in bridge 1/4 sack
hulls and 10 sacks cement. Put 2 sack hulls and 10 sacks
cement. Put 2 sacks cement in rathole.

STATE OF KANSAS RECEIVED
CONSERVATION DIVISION

NOV 26 1979
11-26-1979
Wichita, Kansas
SS.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Berentz Drilling Company


STATE OF Kansas COUNTY OF Greenwood
Kevin Hough (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
Box 428, Eureka, Kansas 67045
(Address)

SUBSCRIBED AND SWORN TO before me this 21 day of November, 1979

[Signature]
Judy C Davis Notary Public.

My commission expires April 6, 1979



15-169-20078 00-00

LOG OF WELL

Krauss #1
NE SW NE
Section 13-16S-2W
Saline County, Ks.

OPERATOR: Gear Petroleum Co.

CONTRACTOR: Berentz Drilling Co.

Commenced with rotary: 11-11-79

Completed with rotary: 11-16-79

Casing: 8 5/8"---172' cemented with 125 sacks

Soil	3'
Shale & Lime	85
Lime & Shale	155
Lime	650
Lime & Shale	1220
Shale & Lime	1903
Sand & Shale	2030
Shale & Lime	2092
Lime, Lansing, KC	2428
Shale & Lime	2737
Lime Miss.	2760 R.T.D.

27127
11-27-1979
Krauss #1
Saline County, Kansas