


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

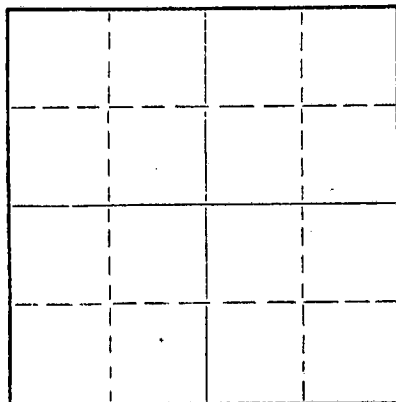

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Toman & Scott
Producing formation Mississippi Depth to top 2759 Bottom 2765 Total Depth of Well 2765 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CAISING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	150'	None
				5-1/2	2760'	2413.30'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled back in the 5 1/2" with gravel, and dumped 5 sacks of cement.
Shot pipe off at 2413.30'. Pulled pipe and mudded hole to 150'.
Set rockbridge and dumped 20 sacks of cement. Mudded hole to 40'.
and set rock bridge and dumped 10 sacks of cement at base of cellar.

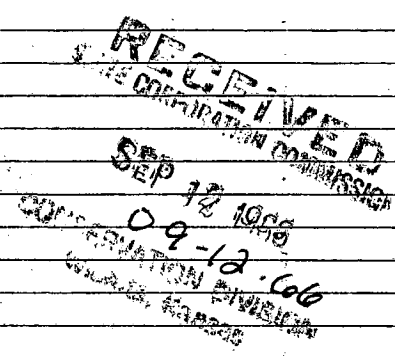

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bert Self
Address Hutchinson, Kans.

STATE OF Kans. COUNTY OF Reno, ss.
Employee (employee of owner) or (owner or operator) of the above-described
well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the
above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Bert Self
R. R. #4, Hutchinson, Kans.
(Address)

SUBSCRIBED AND SWORN to before me this 29th day of August, 1966

My commission expires October 15, 1969

Notary Public.

15-169-00225-00-00

ROTARY DRILLING LOG

OPERATOR: E. K. Carey Drilling Co., Inc.
LEASE: Akers #1
LOCATION: C NE SE, 14-15-2W
Saline County, Kansas
COMMENCED: October 1, 1962
COMPLETED: October 8, 1962

CONTRACTOR: Prime Drilling Company
CASING: Set 8-5/8" @ 150'
w/120 sacks cement.
Set 5-1/2" @ 2760'
w/75 sacks cement.

FORMATIONS:

0 - 150	Surface hole
150 - 400	Lime & Shale
400 - 545	Shale & Lime streaks
545 - 560	Lime & Shale
560 - 934	Lime
934 - 1510	Lime & Shale
1510 - 1705	Shale & Lime
1705 - 2195	Lime & Shale
2195 - 2444	Lime
2444 - 2500	Lime & Shale
2500 - 2570	Shale & Lime Streaks
2570 - 2764	Lime & Shale
2764 - 2765	Mississippian
2765	Rotary Total Depth

RECEIVED
STATE CORPORATION COMMISSION

SEP 12 1966

CONSERVATION DIVISION
TOPEKA, KANSAS

We certify that the above log is true and correct to the best of our knowledge and belief.

PRIME DRILLING COMPANY

BY

R. R. McNicol
R. R. McNicol