


15-077-20005-0000 15-077-2005-0000
Form CP-4

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

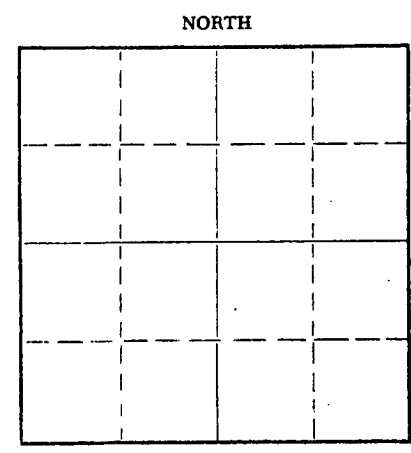

Harper County. Sec. 31 Twp. 31S Rge. 7W (E) (W)
Location as "NE/CNW/SW" or footage from lines SE SW SW
Lease Owner Walters Drilling Co. & Mull Drilling Co.
Lease Name Hostetler Well No. 1
Office Address 400 Insurance Building, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 3-1-67 19
Application for plugging filed 2-28-67 19
Application for plugging approved 2-28-67 19
Plugging commenced 2-28-67 19
Plugging completed 3-1-67 19
Reason for abandonment of well or producing formation commercial quantities of oil not found

Locate well correctly on above Section Plat
Name of Conservation Agent who supervised plugging of this well Archie Elving - Pratt, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4759 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	215'	


Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.
Bottom plug @ 200' w/ 25 sx. cement
Top plug @ 40' w/ 10 sx.
2 sx. - rathole

RECEIVED
STATE CORPORATION COMMISSION
MAR 3 1967
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Walters Drilling Co.
Address 400 Insurance Building, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Robert F. Walters (owner) or (owner & operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) Robert F. Walters
400 Insurance Building, Wichita, Kansas 67202 (Address)

Subscribed and sworn to before me this 3rd day of March, 1967
Juanita M. Green
Notary Public.



DRILLER'S LOG

15 - 077 - 20005 - 0000

COMPANY: WALTERS DRILLING CO. & MULL DRILLING CO.
400 INSURANCE BUILDING
WICHITA, KANSAS 67202

WELL NAME: HOSTETLER #1
SE SW SW SEC. 31-315-7W
HARPER COUNTY, KANSAS

CONTRACTOR: WALTERS DRILLING CO.
400 INSURANCE BUILDING
WICHITA, KANSAS 67202

ROTARY DRILLING COMMENCED: FEBRUARY 15, 1967
ROTARY DRILLING COMPLETED: MARCH 1, 1967

RECEIVED
STATE CORPORATION COMMISSION

ELEVATION: 1476 KB

MAR 3 1967

CASING RECORD: 8 5/8" @ 215' w/ 175 sx.

CONSERVATION DIVISION
Wichita, Kansas

LOG

0 - 165	Sand and Shale
165 - 500	Red Bed and Shale
500 - 1380	Shale and Shells
1380 - 1460	Shale
1460 - 1585	Shale and Lime Streaks
1585 - 1724	Shale and Shells
1724 - 1880	Lime
1880 - 2040	Shale and Lime
2040 - 2045	Lime
2045 - 2165	Shale and Lime Streaks
2165 - 2580	Shale and Lime
2580 - 2760	Shale and Lime Streaks
2760 - 2945	Shale and Lime
2945 - 3050	Lime and Shale
3050 - 3260	Shale and Lime
3260 - 3700	Lime and Shale
3700 - 3850	Shale and Lime
3850 - 3956	Lime
3956 - 4110	Lime and Shale
4110 - 4160	Lime
4160 - 4367	Lime and Shale
4367 - 4382	Shale
4382 - 4478	Chert
4478 - 4585	Chert and Lime
4585 - 4705	Lime and Shale
4705 - 4746	Lime and Sand
4746 - 4759	Lime and Sand
<u>4759</u>	<u>Rotary Total Depth</u>

The undersigned, Robert F. Walters, hereby certifies, in behalf of said company that the above log is a true and correct log of the formations encountered in drilling the above well as reflected by the Daily Drilling Reports.

WALTERS DRILLING CO.

BY

Robert F. Walters

ROBERT F. WALTERS, Partner

Subscribed and sworn to before me
this 3rd day of March, 1967.



Juanita M. Green
Juanita M. Green, Notary Public

My Commission Expires: October 4, 1967