

JAN 16 1978

15-007-20576-0000

CONSERVATION DIVISION
Wichita, Kansas


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Barber County. Sec. 36 Twp. 33S Rge. 10W ~~FW~~
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
1320' FNL & 1980' FWL

Lease Owner Texas Oil & Gas Corp.
Lease Name Miller "K" Well No. 1
Office Address 200 W. Douglas-Suite 300, Wichita, KS
Character of Well (Completed as Oil, Gas or Dry Hole) 67202
Dry Hole

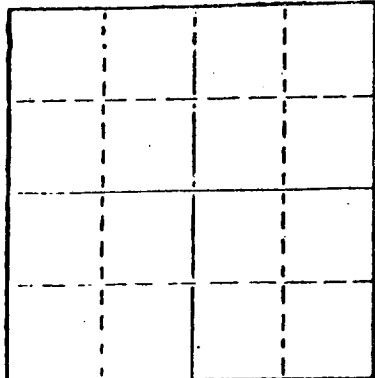

Locate well correctly on above
Section Plat

Date Well completed January 5, 1978
Application for plugging filed Verbal Application 1978
Application for plugging approved Verbal Approval 1978
Plugging commenced January 5, 1978
Plugging completed January 5, 1978
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production
_____ 1978

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Wm. T. Owen
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,631'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	275'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from _____ feet to
_____ feet for each plug set.

Filled hole with heavy rotary mud from 4,631 ft. (rotary total depth) to
267 ft. Set plug at 267 ft. and cemented with 35 sacks cement. Filled
hole with heavy rotary mud from 267 ft. to 40 ft. Set solid plug at
40 ft. and cemented to cellar with 12 sacks cement, 3 sacks cement in rat hole.

Plugging operations accomplished utilizing Allied Cementing, Co., Inc.
pump truck through 4-1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Co., Inc.
Box 31, Russell, KS 67665


STATE OF Kansas COUNTY OF Sedgwick, ss.
Dean Britting, Agent ~~Agent~~ of owner ~~XXXXXXXXXXXXXXXXXXXX~~
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 N. Main, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 13th day of January, 1978

Elsie Willison
Elsie Willison - Notary Public.

My commission expires June 30, 1978



API# 15-007-20,576 ~~0000~~

KANSAS GEOLOGICAL SOCIETY
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS


COMPANY Texas Oil & Gas Corp.

SEC. 36 T. 33S R. 10W
 LOC. 1320' FNL & 1980' FWL

FARM Miller "K" NO. 1

COUNTY Barber
 KANSAS

TOTAL DEPTH 4,631'
 COMM. December 21, 1977 COMP. January 5, 1978
 SHOT OR TREATED
 CONTRACTOR H-30, Inc.
 ISSUE January 13, 1978



CASING		
20	10	
15	8 - 5/8"	275' cemented w/250 sxs cement
12	6	ELEVATION 1,388' K.F.
13	5	

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Shale and Red Bed	275'
Red Bed and Shale	1,520'
Shale	1,565'
Shale and Lime	1,925'
Lime and Shale	2,140'
Shale and Lime	3,265'
Lime and Shale	4,565'
Lime	4,631'
Rotary Total Depth	4,631'

RECEIVED
 STATE CORPORATION COMMISSION
JAN 17 1978
 CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.


Dean Britting

 Dean Britting

State of Kansas }
 County of Sedgwick } ss:

Suscribed and Sworn to before me a Notary Public in and for said county and state this 13th day of

January, 1978.



Elsie Willison

 Elsie Willison - Notary Public

My Commission Expires:
 June 30, 1978