

15-169-200.47-00-00


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

NORTH

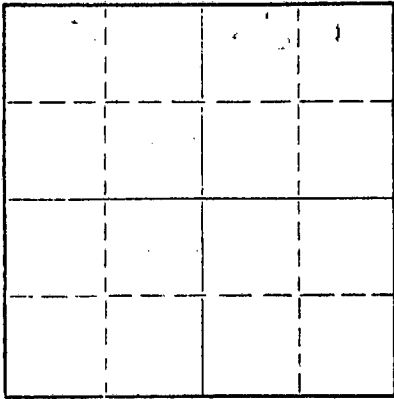

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Shale & Shells		0	270	8 5/8"	270'	
Shale		270	285	8 5/8"	15'	
Anhydrite & Salt		285	480	8 5/8"	195'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 300 ft. & set plug and put in 25 sacks cement. Filled hole to 40 ft. with mud. Set plug and put in 10 sacks cement. Plugging completed at 7:00 A. M., September 20, 1970. Plugging completed by Gilbert Toman, State Plugger, Holyrood, Kansas

RECEIVED
STATE CORPORATION COMMISSION
SEP 24 1970
CONSERVATION DIVISION
Wichita, Kansas

D9-24-1970


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Blackstone Drilling, Inc.
Address Box 455, McPherson, Kansas 67460

STATE OF Kansas, COUNTY OF Sedgewick, ss. _____ (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. MALLONEE-MAHONEY, INC.

(Signature) BY: JW Mallonee
925 Sutton Place, Wichita, Kansas
(Address)



SUBSCRIBED AND SWORN to before me this 23rd day of September, 1970
LEOLA LYNKEY, Notary Public
My Commission expires: April 13, 1972
Leola Lynskey
Notary Public.



15-169-20047-00-00

Blackstone Drilling, Inc.

Box 455 • 523 West Kansas • Phone CH 1-1250

McPHERSON, KANSAS 67460

September 22, 1970

COMPANY: MALLONEE-MAHONEY, INC.
CONTRACTOR: BLACKSTONE DRILLING, INC.
FARM: CHRISTOPHER #1
LOCATION: NW 1/4 SE Sec. 22-168-4W,
Saline County, Kansas
COMMENCED: September 6, 1970
COMPLETED: September 20, 1970
ELEVATION: 1002 K. D.

0	to	390	Shale & Shale
390	to	203	Shale
203	to	600	Anhydrite & Salt
600	to	1000	Lime
1000	to	1753	Shale & Lime
1753	to	2100	Lime
2100	to	2300	Shale & Lime
2300	to	2770	Lime
2770	to	3040	Lime & Shale
3040	to	3200	Mississippi
3200	to	3373	Lime & Shale
3373	to	3425	Shale
3425	to	3500	Maquoketa Dolomite
3500	to	3585	Shale
3585	to	3670	Lime
3670	to	3801	Shale & Lime
3801	to	3910	Simpson Shale
3910	to	3915	Simpson Sand
3915	to	3920	Sand
		3920	P. D.

RECEIVED
STATE CORPORATION COMMISSION
SEP 24 1970
CONSERVATION DIVISION
Wichita, Kansas
C9-24-1970

Cut 12 1/4 in. hole to 600 ft. and ran 600 ft. of 8 9/16 in. surface pipe, cemented with 325 sacks at 600 ft., plug down at 9:00 P. M., September 6, 1970. Cut 7 7/16 in. hole to 3720 ft. Hole dry and abandoned. Filled hole with mud to 300 ft. Set plug and put in 25 sacks cement. Filled hole to 60 ft. with mud. Set plug and put in 10 sacks cement. Plugging completed at 7:00 A. M., September 20, 1970. Plugging completed by Gilbert Tomlin, State Plugger, Holyrood, Kansas.

TOPS: BROWN LIME - 2910' KANSAS CITY - 2800' MISSISSIPPI - 3040'
MAQUOKETA DOLOMITE - 3525' SIMPSON SHALE - 3801' SIMPSON SAND - 3910'


Measurements taken from K. D.

CERTIFICATE

I, H. J. Plouffe, President of Blackstone Drilling, Inc. do hereby certify that the above and foregoing is a true and correct copy of log on your Christopher #1, located on the NW 1/4 SE, Sec. 22-168-4W, Saline County, Kansas as reflected by the files of Blackstone Drilling, Inc.

H. J. Plouffe
H. J. Plouffe, President

Subscribed and sworn to before me a Notary Public in and for McPherson County, Kansas this 22nd day of September, 1970.



Johnnie L. Schmidt
Johnnie L. Schmidt, Notary Public

Witnessed: June 27, 1973