

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-171-20575-00-00

Spot: N2NWSW

Sec/Twnshp/Rge: 7-18S-31W

2310 feet from S Section Line, 4690 feet from E Section Line

Lease/Unit Name: RENZ

Well Number: 1

County: SCOTT

Total Vertical Depth: 4652 feet

Operator License No.: 5011

Surface Casing Size: 8.625 feet: 215

Op Name: VIKING RESOURCES, INC

Address: 105 S BROADWAY, STE 1040  
WICHITA, KS 67202

\$151.19

Well Type: DH

UIC Docket No:

Date/Time to Plug: 05/02/2003 4:15 PM

Plug Co. License No.: 5123

Plug Co. Name: PICKRELL DRILLING COMPANY, INC.

Proposal Rcvd. from: MIKE KERNS

Company: PICKRELL DRILLING COMPANY, I Phone: (316) 262-8427

Proposed Plugging Method: 1ST PLUG AT 2318' WITH 50 SX CMT. 2ND PLUG AT 1550' WITH 80 SX CMT. 3RD PLUG AT 750' WITH 50 SX CMT. 4TH PLUG AT 245' WITH 40 SX CMT. 5TH PLUG AT 40' WITH 10 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

Plugging Proposal Received By: STEVE PFEIFER

WitnessType: Plugging Operations Were Not Witnessed

Date/Time Plugging Completed: 05/02/2003 6:45 PM

KCC Agent: STEVE PFEIFER

Actual Plugging Report:

1ST PLUG AT 2318' WITH 50 SX CMT. 2ND PLUG AT 1550' WITH 80 SX CMT. 3RD PLUG AT 750' WITH 50 SX CMT. 4TH PLUG AT 245' WITH 40 SX CMT. 5TH PLUG AT 40' WITH 10 SX CMT. 6TH PLUG TO CIRCULATE RAT HOLE WITH 15 SX CMT. NO MOUSE HOLE.

RECEIVED

MAY 13 2003

KCC WICHITA


Remarks: USED 60/40 POZMIX 6% GEL 1/4# FLO SEAL BY ALLIED.

Plugged through: DP

District: 01

Signed

Steve Pfeifer  
(TECHNICIAN)

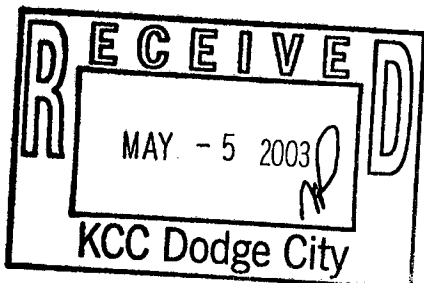

INVOICEL

DATE 5-14-03

INV. NO. 2003061528

Form CP-28