

15-169-19116-00-00

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Saline County, Sec. 13 Twp. 15 Rge. 3 W(E) (W)

Location as "NE/CNW/SW" or footage from lines. C SW SW

Lease Owner Melland Drilling Co., Inc.

Lease Name Carlin Well No. 2

Office Address 901 North Main McPherson, Kansas 67460

Character of Well (completed as Oil, Gas or Dry Hole) Oil S-W-D

Date well completed 1-8 19 62

Application for plugging filed 1-30 19 76

Application for plugging approved 1-31 19 76


Plugging commenced 2-2 19 76

Plugging completed 2-4 19 76

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

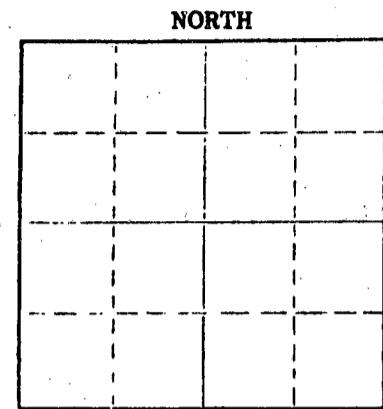

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3289'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: FORMATION, CONTENT, FROM, TO, SIZE, PUT IN, PULLED OUT. One entry: SIZE 5 1/2", PULLED OUT 2,219'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

RECEIVED

STATE CORPORATION COMMISSION

FEB 6 1976

CONSERVATION DIVISION
Wichita, Kansas

Plugged off bottom of hole with sand. Sand from 3289' to 3250'. Dumped 5 sx of cement. Mudded hole to 255'. Made 15' of rock bridge. Dumped 3 1/2 yds of Ready-Mix cement, filling to the bottom of the celler.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Inc.

Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas COUNTY OF Reno ss.

Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Art Lamb

2809 King St. Hutchinson, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 5th day of February, 1976

My commission expires December 31, 1977

Judy Lamb Notary Public.



STENCILED

ORIGINAL

APR 12 1966

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY MELLAND DRIG.

SEC. 13 T. 15 R. 3W
LOC. C SW SW

FARM Carlin

NO. 2

15-169-19116-00-00

TOTAL DEPTH 3289

COMM. 12-22-61

COMP. 1-8-62


SHOT OR TREATED

CONTRACTOR Melland Drlg.

ISSUED 8-13-66

COUNTY Saline

KANSAS



CASING

20 10
15 8 5/8" @ 255'
12 6
13 5 1/2" @ 3282'
3282'

ELEVATION 1264'RB

PRODUCTION 25 BOPD

FIGURES INDICATE BOTTOM OF FORMATIONS

clay, shale	42
sand	70
shale	195
Anhy	255
lime	340
lime, shale	765
lime	800
lime, shale	1030
lime, red bed	1580
lime, shale	1880
shale, redbed	2075
lime, shale	2530
shale	2770
Mississippi lime	2955
limeshshale	3040
shale	3165
lime	3200
shale, lime	3253
lime	3289
Total Depth	

TOPS: SCOUT

Mississippi	2715
Kinderhook	2989
Hunton	3137
Maquoketa Shale	3172
" Dolomite	3246
Viola	3283

RECEIVED
STATE CORPORATION COMMISSION

FEB 3 1976

CONSERVATION DIVISION
Wichita, Kansas