


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Saline County, Sec. 13 Twp. 15S Rge. 3 (E) W (W)

Location as "NE/CNW/SW" or footage from lines C SW NE
Lease Owner: Midwest Supply Company
Lease Name: Muir Well No. 3
Office Address: 343 Marmaton Rd, El Dorado, Ks 67042
Character of Well (completed as Oil, Gas or Dry Hole) oil
Date well completed: October 25 19.61
Application for plugging filed: March 9 19.74
Application for plugging approved: March 12 19.74
Plugging commenced: June 7 19.74
Plugging completed: June 12 19.74
Reason for abandonment of well or producing formation: depleted

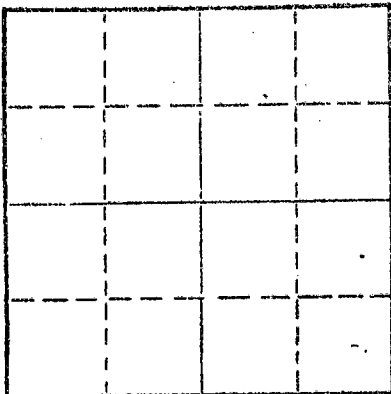

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production: 19.____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well: Mr. Gilbert Toman
Producing formation: _____ Depth to top: _____ Bottom: _____ Total Depth of Well: 3269 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	299'	none
				4 1/2"	3264'	2505.78'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Rig up and dig out cellar. Sand back to 3250' and added 3 sacks of cement to plug to bottom. Put a 10' rock bridge at 210' to 200' and added 25 sacks of cement. Put a 10' rock bridge at 40' to 30' and added 10 sacks of cement to plug to surface.

RECEIVED
STATE CORPORATION COMMISSION
JUN 26 1974
CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor: THE BUCKEYE CORPORATION
Address: Box 1020, El Dorado, Ks 67042

STATE OF KANSAS, COUNTY OF BUTLER, ss.
Charles V. Cross (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Charles V. Cross*
Box 1020, El Dorado, Ks 67042
(Address)

SUBSCRIBED AND SWORN to before me this 22nd day of June, 1974

My commission expires _____
ISA L. FISHER
STATE NOTARY PUBLIC
Butler County, Ks.
My Commission Expires
June 30, 1975

Isa L. Fisher
Notary Public.

COPY

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas


15-169-19111-00-02

Company- MUTUAL OIL COMPANY
Farm- Muir No. 3

SEC. 13 T. 15 R.3W
C SW NE

Total Depth. 3269'
Comm. 10-17-61 Comp. 10-25-61
Shot or Treated.
Contractor. Group Exploration Co.
Issued: 2-3-62

County Saline KANSAS



Elevation. 1262' RB

Production. 20 BOPD

CASING:

8 5/8" 299' cem w/250 sx.
4 1/2" 3264' cem w/50 sx.

Figures Indicate Bottom of Formations.

shale & lime	730
lime	930
shale & lime	2150
KC & lime	2280
shale & lime	2705
Mississippi lime	2880
Miss. lime & chert	2922
shale & lime	3015
shale	3115
lime	3135
shale & lime	3185 RB
lime	3269
Total Depth	

TOPS: SCOUT
Maquoketa Dolomite 3265

RECEIVED
STATE CORPORATION COMMISSION
MAR 12 1974
CONSERVATION DIVISION
Wichita, Kansas