

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Saline County. Sec. 32 Twp. 15 Rge. 3 (E) (W)

Location as "NE/CNW/SW" or footage from lines SW SE NE

Lease Owner Wayne Weeks

Lease Name Brown Well No. 1

Office Address Salina, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed _____ 19__

Application for plugging approved _____ 19__


Plugging commenced 8/9/67 _____ 19__

Plugging completed 8/12/67 _____ 19__

Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

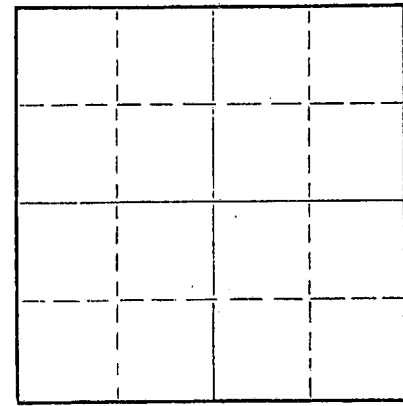

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Toman

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3352 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	356'	none
				4-1/2"	3347'	2493'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Checked bottom, ran sand to 3300' and ran 3 sacks of cement.

~~Loaded hole, shot pipe at 2936', 2869', 2787', 2693', 2497'.~~

Pulled pipe, set 10' rock bridge at 300', dumped 20 sacks of cement, mudded to 40' rock bridge and dumped 10 sacks of cement.

Tallied pipe.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION

OCT 19 1967

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.

DONALD N. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Donald Knight

CHASE, KANSAS

(Address)

SUBSCRIBED AND SWORN to before me this 14th day of August, 19 67

Margaret Melcher

Notary Public.

My commission expires February 15, 1971

