

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGIN
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-003-22510-00-00
Spot: SWSWNENE Sec/Twnshp/Rge: 34-21S-19E
4289 feet from S Section Line, 1066 feet from E Section Line
Lease Name: KELLSTADT Well #: 2184
County: ANDERSON Total Vertical Depth: 848 feet

Operator License No.: 33097
Op Name: SOUTHERN STAR CENTRAL GAS PIPE
Address: 4700 HWY 56
OWENSBORO, KY 42301

String	Size	Depth (ft)	Pulled (ft)	Comments
SURF	6.625	21		
PROD	2.875	828		

Well Type: EOR UIC Docket No: E11406.1 Date/Time to Plug: 01/05/2012 12:00 PM
Plug Co. License No.: 33749 Plug Co. Name: KEPLEY WELL SERVICE, LLC
Proposal Rcvd. from: STERLING BARKER Company: SOUTHERN STAR Phone: (785) 448-4816

Proposed Plugging Method: Run work string to bottom, cement to surface. Pull work string, tie onto well and squeeze cement until desired pressure is achieved. Cut off pipe 3' below surface, cap, and backfill.

Plugging Proposal Received By: JOHN ALMOND Witness Type: NONE
Date/Time Plugging Completed: 01/05/2012 11:00 AM KCC Agent: JOHN ALMOND

Actual Plugging Report:

Contractor ran 1" pipe to TD, circulated portland cement to surface, pulled 1" out, topped off well, hooked to 2-7/8" and squeezed cement into well, shut in at 600 psi. Contractor indicated that they used 47 sacks cement to plug well.

Perfs:

Top	Bot	Thru	Comments
828	848		SQUIRREL

RECEIVED

FEB 13 2012

JA


KCC Chanute Dist. #3

Remarks:

Plugged through: TBG

District: 03

Signed

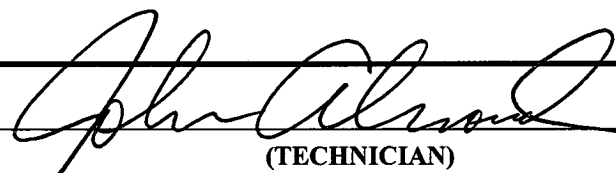

(TECHNICIAN)

cc to UIC 2/17/12

RECEIVED

Form CP-2/3

FEB 16 2012

2/21/12

KCC WICHITA