

15-169-00211-00-00

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Saline County, Sec. 12 Twp. 15 Rge. 3 (E) 3 (W)  
Location as "NE/CNW/SW" or footage from lines SE SE SE

Lease Owner Donald T. Ingling et al

Lease Name F. E. Anderson Well No. 1

Office Address 615 First Nat'l Bldg., Wichita, Kans

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed May 12, 19 61

Application for plugging filed Feb 19 65

Application for plugging approved Feb 19 65

Plugging commenced Feb. 27, 19 65


Plugging completed Mar. 22, 19 65

Reason for abandonment of well or producing formation Production declined

below economic limit

If a producing well is abandoned, date of last production April 30, 19 64

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

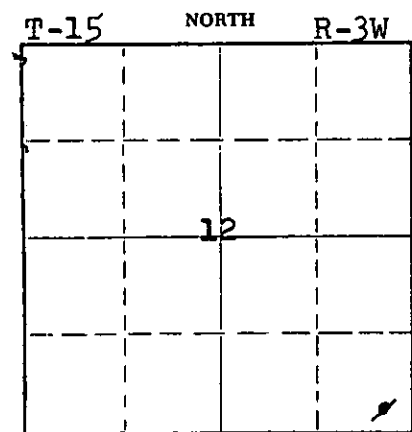

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Maquoketa dolomite Depth to top 3243 Bottom \_\_\_\_\_ Total Depth of Well 3251 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	250'	none
				4 1/2"	3244'	2505'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled back in the 4 1/2" with rock and gravel and dumped 3 sacks of cement. Shot pipe off at 2505'. Pulled pipe and mudded hole to 250'. Set rock bridge and finished filling surface with ready mix cement

RECEIVED  
STATE CORPORATION COMMISSION

MAY 19 1965  
05-19-1965  
CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Bert Self

Address Hutchinson, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

D. T. Ingling (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

615 First National Bldg., Wichita

(Address)

SUBSCRIBED AND SWORN TO before me this 30th day of April, 19 65

My commission expires Feb. 27, 1968

Notary Public.

15-1109-00211-00-00

WELL LOG - F. E. ANDERSON NO. 1

Donald T. Ingling et al, Lease Owner

Section 12-15-3W

Donald T. Ingling, Contractor

Location: SE SE SE

Commenced: 4-17-61

County: Saline

Completed: 4-25-61

Production:

Total Depth: 3251' (rotary)

Elevation: 1258 RB

Casing: 8 5/8" 250' (175 sacks cement)  
4 1/2" 3244' (50 sacks cement)

Figures below indicate bottom formation

30 surface clay  
 155 sand and shale  
 230 lime and shale  
 410 lime  
 715 lime  
 915 lime  
 1295 shale and shells  
 1615 lime  
 1765 lime  
 1900 lime  
 2060 shale and shells  
 2115 lime and shale streaks  
 2150 lime and shale  
 2350 lime  
 2380 lime  
 2475 shale and lime  
 2600 shale and lime  
 2695 shale  
 2696 Mississippi - top  
 2780 lime  
 2890 lime  
 2907 lime  
 2911 shale - Kinderhook - top  
 2940 shale  
 3025 shale  
 3091 shale  
 3130 lime  
 3173 lime  
 3190 shale  
 3243 shale  
 3251 lime  
 3251 Total Depth

RECEIVED  
STATE CORPORATION COMMISSION

MAY 19 1965  
05-19-1965  
CONSERVATION DIVISION  
Wichita, Kansas

I certify this is a true and correct copy of the above mentioned well.

STATE OF KANSAS )  
SEDGWICK COUNTY ) ss.

*[Signature]*

Subscribed and sworn to before me, a Notary Public, in said county and state.

*[Signature]*  
Notary Public

My commission expires: Feb. 27, 1964