


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give Address of well in block
State Required 1944
Model of Well or Project
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

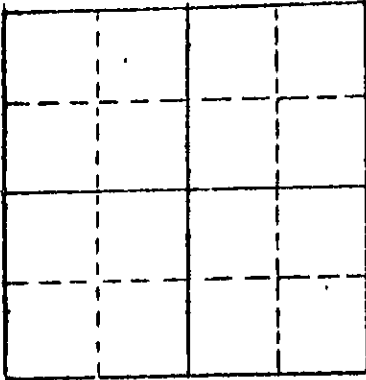

Locate well correctly on above
Section Plat

Greeley County, Sec. 26 Twp. 17S Rge. 11W (W)
Location as "NE/CN/SE/SW" or footage from lines SW/4
Lease Owner R. C. Banks
Lease Name Zimmerman Well No. 1
Office Address P. O. Box 242, Midland, Texas 79701
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed February 4, 1975 10
Application for plugging filed February 4, 1975 10
Application for plugging approved February 4, 1975 10
Plugging commenced 2:00 PM, February 4, 1975 10
Plugging completed 4:45 PM, February 4, 1975 10
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production _____ 10
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Leo Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3275' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	242'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud.
70 sacks 50/50 Pozmix at 1150';
6% gel through open end of drill pipe;
20 sacks at 215' through open end of drill pipe;
solid plug and 10 sacks @ 40';
2 sacks in rathole.

RECEIVED
STATE CORPORATION COMMISSION

FEB 18 1975

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor STERLING DRILLING COMPANY
Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE ss.
F. A. Wuellner

(employe of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) F. A. Wuellner
F. A. Wuellner, Secretary
P. O. Box 129, Sterling, Kansas 67579
(Address)

Subscribed and Sworn to before me this 13th day of February, 1975

Bernard Laudermilk
Bernard Laudermilk, Notary Public.

My commission expires _____
BERNARD LAUDERMILK—NOTARY PUBLIC
My Commission Expires Jun. 22, 1978

1507120070.0000

STERLING DRILLING COMPANY
P. O. Box 129
Sterling, Kansas 67579

WELL LOG ----- ZIMMERMAN #1
Located: SW/4, Section 26-17S-41W, Greeley County,
Kansas

OWNER: R. C. Banks
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: January 30, 1975
COMPLETED: February 4, 1975

TOTAL DEPTH: 3275'

<u>LOG</u>	
0 - 200	Sand and Clay
200 - 245	Shale
245 - 1345	Shale, Salt
1345 - 2070	Shale
2070 - 2525	Shale, Lime, Salt
2525 - 2780	Lime and Shale
2780 - 2930	Shale
2930 - 2984	Shale and Lime
2984 - 3105	Shale
3105 - 3275	Lime and Shale

CASING RECORD

Ran 6 joints used 8 5/8" 26# casing,
831.81' set at 242' K.B. with 200 sacks
Class H, with 1/4# D-29 per sack and
3% cc. Plug down at 9:40 PM, 1-30-75.

Plugged.

RECEIVED
STATE CORPORATION COMMISSION
FEB 18 1975
CONSERVATION DIVISION
Wichita, Kansas