


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

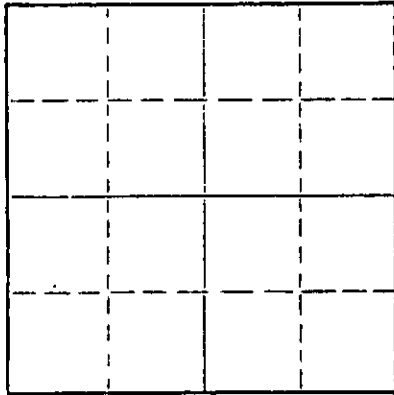

Locate well correctly on above
Section Plat

Saline County, Sec. 23 Twp. 15 Rge. 3 W (E) (W)

Location as "NE/CNWXSWX" or footage from lines C SE SE

Lease Owner Cal Jones

Lease Name Miller Well No. 2

Office Address Rr 5 Canton, Kansas 67428

Character of Well (completed as Oil, Gas or Dry Hole) oil

Date well completed 12-5 1961

Application for plugging filed 5-3 19 69

Application for plugging approved 5-5 19 69

Plugging commenced 5-20 19 69

Plugging completed 5-27 19 69

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Toman

Producing formation Depth to top Bottom Total Depth of Well 3296' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"		2,731'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged off bottom of hole with sans. Sand from 3296' to 3280'. Dumped 5 sx of cement. Mudded hole to 260'. Made 10' of rock bridge. Dumped 25 sx of cement. Mudded hole to 40'. Made 10' of rock bridge. Dumped 10 sx of cement, filling to the bottom of the cellar.

RECEIVED
STATE CORPORATION COMMISSION
JUN 5 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Art Lamb Casing Pulling Co.

Address 2809 King St. Hutchinson, Kansas 67501

STATE OF Kansas, COUNTY OF Reno, ss.

Art Lamb (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Art Lamb*

2809 King St. Hutchinson, Kansas 67501
(Address)

SUBSCRIBED AND SWORN TO before me this 27th day of May, 1969

My commission expires Jan 5, 1970

Rudy Lamb
Notary Public.

15-169-19106-0000

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

COPY


Company- CAL JONES
Farm- Miller

No. 2

SEC. 23 T. 15 R. 3W
C SE SE

Total Depth. 3296'
Comm. 11-25-61 Comp. 12-5-61
Shot or Treated.
Contractor. Melland Drig. Co.
Issued. 4-7-62

County Saline
KANSAS



Elevation. 1282'

Production. 25 BOPD

CASING:

8 5/8" 275' cem w/200 sx.
5 1/2" 3295' cem w/75 sx.

Figures Indicate Bottom of Formations.

surface soil & sand	60
shale & shells	215
Anhydrite	275
lime & shale	700
lime	945
lime & shale	1045
shale & shells	1442
lime & shale	1860
shale & shells	2110
lime & shale	2435
lime & shale	2785
Mississippi lime	2965
lime & shale	3000
shale	3250
lime	3296 RTD
Total Depth	

TOPS: SCOUT	
Mississippi	2747
Kinderhook	3007
Hunton	3167
Maquoketa Shale	3176
Maquoketa Dolomite	3254
Viola	3294

RECEIVED
STATE CORPORATION COMMISSION
MAY 5 1969
CONSERVATION DIVISION
Wichita, Kansas